


Features

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance



Schematic Diagram



Package SOT-23

Maximum Ratings and Thermal Characteristics

($T_A=25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Limit	Unit
Reverse Voltage	V_R	70	V
Forward Current	I_F	200	mA
Non-Repetitive Peak Forward Surge Current @ $t=8.3\text{ms}$	I_{FSM}	2.0	A
Power Dissipation	P_D	225	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Reverse Breakdown Voltage	V_R	70			V	$I_R=100\mu\text{A}$
Forward Voltage	V_{F1}			0.715	V	$I_F=1\text{mA}$
	V_{F2}			0.855	V	$I_F=10\text{mA}$
	V_{F3}			1	V	$I_F=50\text{mA}$
	V_{F4}			1.25	V	$I_F=150\text{mA}$
Reverse Current	I_R			2.5	μA	$V_R=70\text{V}$
Capacitance Between Terminals	C_T			1.5	pF	$V_R=0, f=1\text{MHz}$
Reverse Recovery Time	t_{rr}			6	ns	$I_F = I_R = 10\text{mA}$, $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$

Typical Characteristic Curves


Forward Characteristics

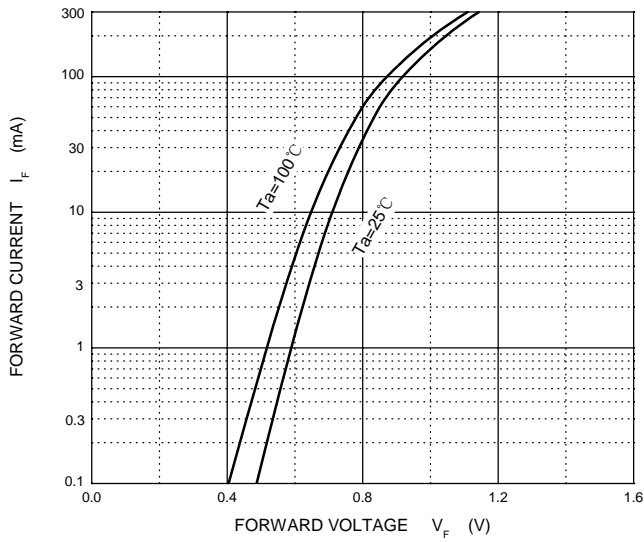


Reverse Characteristics

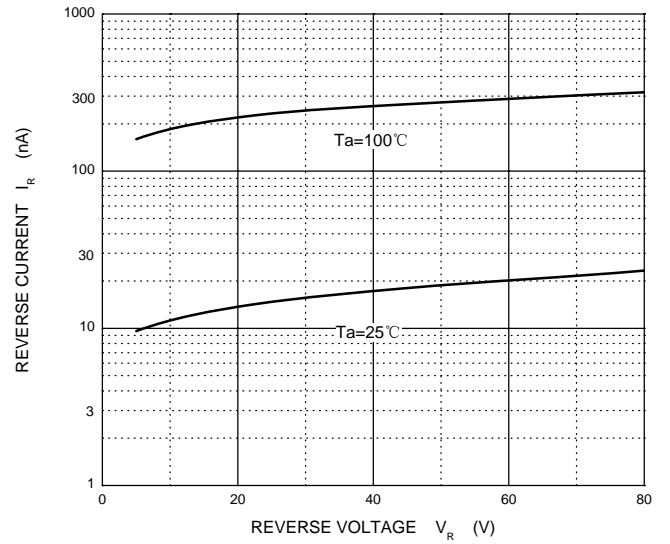

Capacitance Characteristics

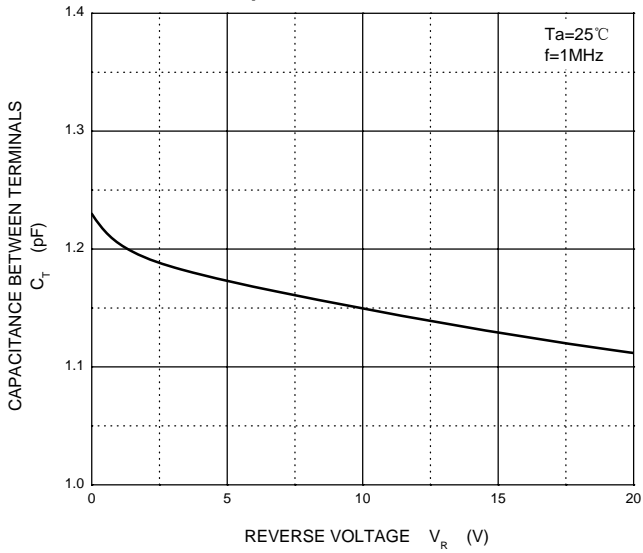


Power Derating Curve

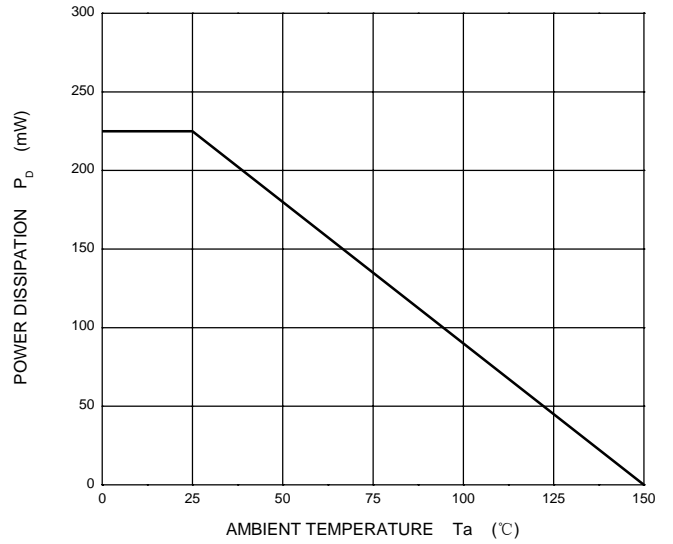

Package Outline Dimensions

SOT-23

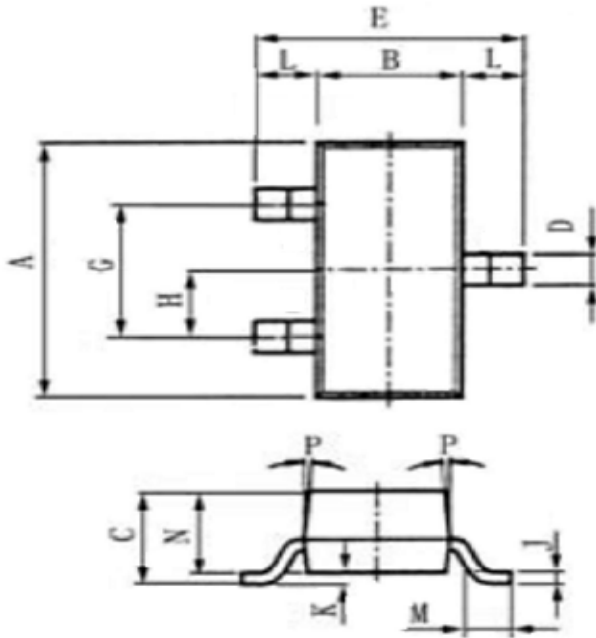

A	2.9±0.02
B	1.30+0.20/-0.15
C	1.30MAX
D	0.40+0.15/-0.05
E	2.40+0.30/-0.20
G	1.9±0.2
H	0.95±0.1
J	0.10+0.10/-0.05
K	0.00-0.10
L	0.55±0.1
M	0.2MIN
N	1.00+0.20/-0.10
P	7"