



Main Product Characteristics

$V_{(BR)DSS}$	60V
$R_{DS(ON)}$	28m Ω (max.)
I_D	30A



PPAK3x3



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery
- AEC-Q101 qualified



Description

The GSFN6028AU utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings (T_C=25°C unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-to-Source Voltage	V_{GS}	±20	V
Continuous Drain Current, @ Steady-State (T _C =25°C) ¹	I_D	30	A
Continuous Drain Current, @ Steady-State (T _C =100°C)		19	A
Pulsed Drain Current ²	I_{DM}	120	A
Power Dissipation (T _C =25°C)	P_D	26	W
Linear Derating Factor (T _C =25°C)		0.18	W/°C
Single Pulse Avalanche Energy ³	E_{AS}	256	mJ
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	5.77	°C/W
Thermal Resistance Junction-to-Ambient (PCB Mounted, Steady-State) ⁴	$R_{\theta JA}$	62.0	°C/W
Operating Junction and Storage Temperature Range	T_J/T_{STG}	-55 to +175	°C

Electrical Characteristics ($T_C=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	60	-	-	V
Drain-to-Source Leakage Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V, T_J=25^\circ\text{C}$	-	-	1.0	μA
		$V_{DS}=60V, V_{GS}=0V, T_J=125^\circ\text{C}$	-	1.2	-	
Gate-to-Source Forward Leakage	I_{GSS}	$V_{DS}=0V, V_{GS}=20V$	-	-	100	nA
		$V_{DS}=0V, V_{GS}=-20V$	-	-	-100	
Static Drain-to-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=15A$	-	23	28	m Ω
		$V_{GS}=4.5V, I_D=8A$	-	26	34	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.1	-	2.7	V
Dynamic and Switching Characteristics						
Input Capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=30V, f=1\text{MHz}$	-	1051	-	pF
Output Capacitance	C_{oss}		-	108	-	
Reverse Transfer Capacitance	C_{rss}		-	100	-	
Total Gate Charge	Q_g	$I_D=10A, V_{DD}=30V, V_{GS}=10V$	-	32	-	nC
Gate-to-Source Charge	Q_{gs}		-	3.4	-	
Gate-to-Drain ("Miller") Charge	Q_{gd}		-	6.4	-	
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=30V, V_{GS}=10V, R_G=3\Omega, I_D=10A$	-	13	-	nS
Rise Time	t_r		-	2.6	-	
Turn-Off Delay Time	$t_{d(off)}$		-	27	-	
Fall Time	t_f		-	3.3	-	
Gate Resistance	R_g	$f=1\text{MHz}$	-	1.3	-	Ω
Source-Drain Ratings and Characteristics						
Continuous Source Current (Body Diode)	I_S	MOSFET symbol showing the integral reverse p-n junction diode.	-	-	64	A
Diode Pulse Current	$I_{S,pulse}$		-	-	256	A
Diode Forward Voltage	V_{SD}	$I_S=5A, V_{GS}=0V$	-	-	1.4	V
Reverse Recovery Time	T_{rr}	$I_S=10A, V_{GS}=0V, V_R=30V, dI_F/dt=100A/\mu s$	-	19	-	nS
Reverse Recovery Charge	Q_{rr}		-	15	-	nC

Notes:

1. Pulse test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
2. Repetitive rating; pulse width limited by max. junction temperature.
3. $L=0.5\text{mH}$, $V_{DD}=30V$, $R_G=25\Omega$, $T_J=25^\circ\text{C}$.
4. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

Typical Electrical and Thermal Characteristic Curves

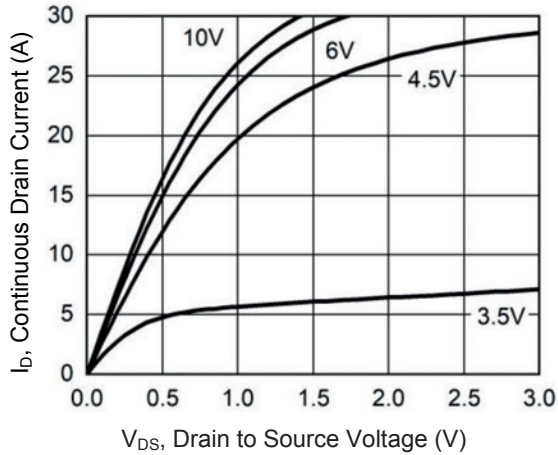


Figure 1. Output Characteristics

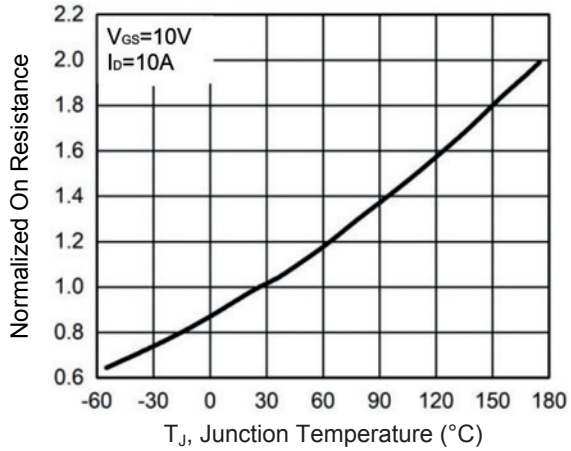


Figure 2. Normalized $R_{DS(ON)}$ vs. T_J

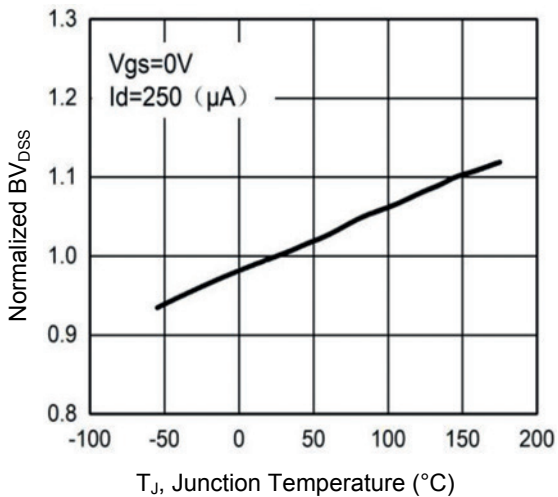


Figure 3. Normalized BV_{DS} vs. T_J

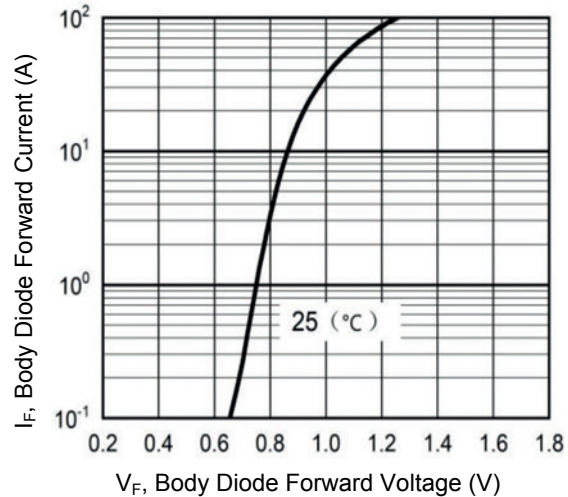


Figure 4. Body Diode Characteristics

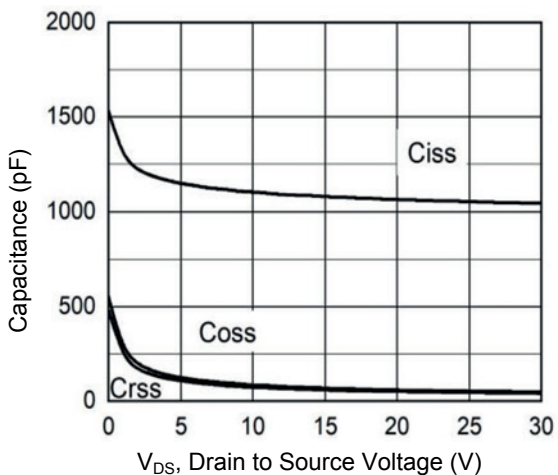


Figure 5. Capacitance Characteristics


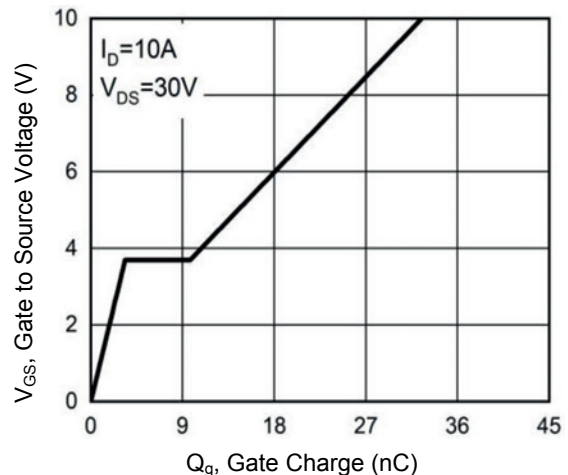


Figure 6. Gate Charge Characteristics

Package Outline Dimensions (PPAK3x3)

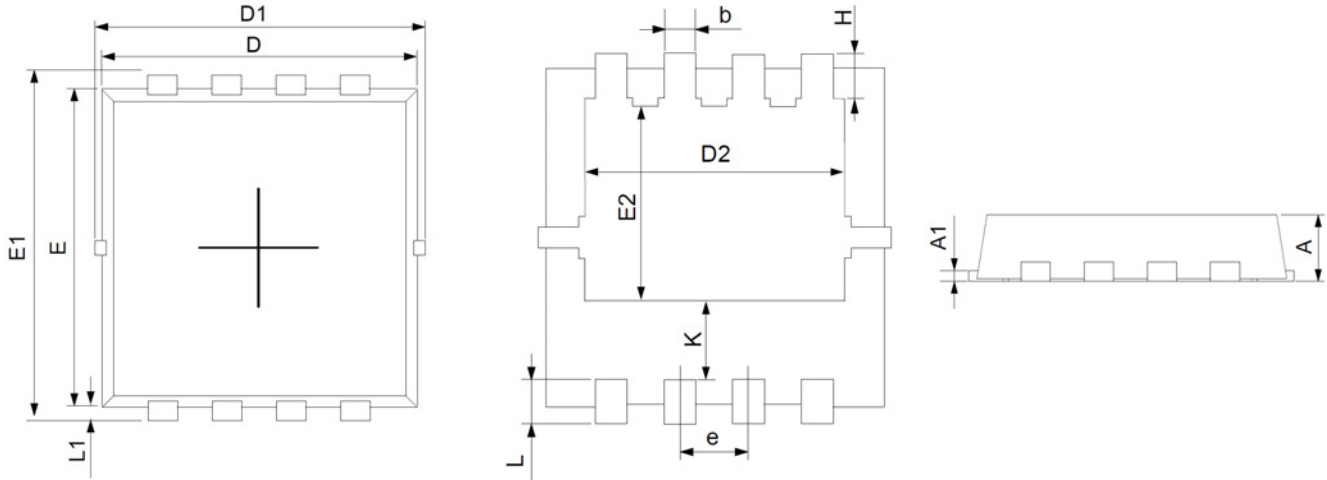

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.70	0.90	0.028	0.035
A1	0.14	0.20	0.006	0.008
D	3.05	3.25	0.120	0.128
E	2.90	3.10	0.114	0.122
D1	3.10	3.50	0.122	0.138
D2	2.35	2.50	0.093	0.098
E1	3.10	3.50	0.122	0.138
E2	1.64	1.84	0.065	0.072
b	0.25	0.35	0.010	0.014
k	0.59	0.79	0.023	0.031
e	0.55	0.75	0.022	0.030
L	0.25	0.55	0.010	0.022
L1	0.10	0.20	0.004	0.008
H	0.32	0.52	0.013	0.020

Order Information

Device	Package	Marking	Carrier	Quantity
GSFN6028AU	PPAK3x3	N6028AU	Tape & Reel	5,000 pcs / Reel