



Main Product Characteristics

$V_{(BR)DSS}$	60V
$R_{DS(ON)}$	6.2m Ω (Max.)
I_D	91A



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery
- AEC-Q101 qualified



Description

The GSGP6R206HAU utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings ($T_J=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Parameter	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-to-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current, @ Steady-State ($T_C=25^{\circ}\text{C}$)	I_D	91	A
Continuous Drain Current, @ Steady-State ($T_C=100^{\circ}\text{C}$)		64	A
Pulsed Drain Current ²	I_{DM}	360	A
Power Dissipation ($T_C=25^{\circ}\text{C}$) ³	P_D	60	W
		0.4	W/ $^{\circ}\text{C}$
Single Pulse Avalanche Energy ¹	E_{AS}	144	mJ
Single Pulse Avalanche Current	I_{AS}	24	A
Thermal Resistance Junction-to-Ambient (PCB Mounted, Steady-State)	$R_{\theta JA}$	50	$^{\circ}\text{C/W}$
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	2.5	$^{\circ}\text{C/W}$
Operating Junction and Storage Temperature Range	T_J/T_{STG}	-55 to +175	$^{\circ}\text{C}$
Soldering Temperature	T_{sld}	260	$^{\circ}\text{C}$

Electrical Characteristics (T_J=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-to-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =250μA	60	-	-	V
Drain-to-Source Leakage Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V, T _J =25°C	-	-	1.0	μA
		V _{DS} =60V, V _{GS} =0V, T _J =125°C	-	2.5	-	μA
Gate-to-Source Forward Leakage	I _{GSS}	V _{DS} =0V, V _{GS} =20V	-	-	100	nA
		V _{DS} =0V, V _{GS} =-20V	-	-	-100	
Static Drain-to-Source On-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =14A	-	4.8	6.2	mΩ
		V _{GS} =6.5V, I _D =10A	-	6.9	12	
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	2.1	-	3.9	V
Dynamic and Switching Characteristics						
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =30V, f=1MHz	-	1650	-	pF
Output Capacitance	C _{oss}		-	658	-	
Reverse Transfer Capacitance	C _{rss}		-	48	-	
Total Gate Charge ^{4,5}	Q _g	I _D =16A, V _{DD} =30V, V _{GS} =10V	-	32	-	nC
Gate-to-Source Charge ^{4,5}	Q _{gs}		-	7.3	-	
Gate-to-Drain ("Miller") Charge ^{4,5}	Q _{gd}		-	7.1	-	
Gate Plateau ^{4,5}	V _{plateau}		-	4.0	-	V
Turn-on Delay Time ^{4,5}	t _{d(on)}	V _{DD} =30V, V _{GS} =10V, R _G =3Ω, I _D =16A	-	10	-	nS
Rise Time ^{4,5}	t _r		-	64	-	
Turn-Off Delay Time ^{4,5}	t _{d(off)}		-	36	-	
Fall Time ^{4,5}	t _f		-	12	-	
Gate Resistance	R _g	f=1MHz	-	2.1	-	Ω
Source-Drain Ratings and Characteristics						
Continuous Source Current (Body Diode)	I _S	V _G =V _D =0V	-	-	90	A
Diode Forward Voltage	V _{SD}	I _S =15A, V _{GS} =0V	-	-	1.4	V
Reverse Recovery Time ⁴	T _{rr}	I _S =16A, V _{GS} =0V, V _R =48V, dI _F /dt=100A/μs	-	35	-	nS
Reverse Recovery Charge ⁴	Q _{rr}		-	30	-	nC

Notes:

1. L=0.5mH, V_{DD}=48V, R_G=25Ω, starting temperature T_J=25°C.
2. Pulse time of 5μs.
3. The dissipated power value will change with the temperature. When it is greater than 25°C, the dissipated power value will decrease by 0.55°C/W for every 1 degree of temperature increase.
4. Pulse test: Pulse width ≤ 300μs, duty cycle ≤ 2%.
5. Basically unaffected by operating temperature.

Typical Electrical and Thermal Characteristic Curves

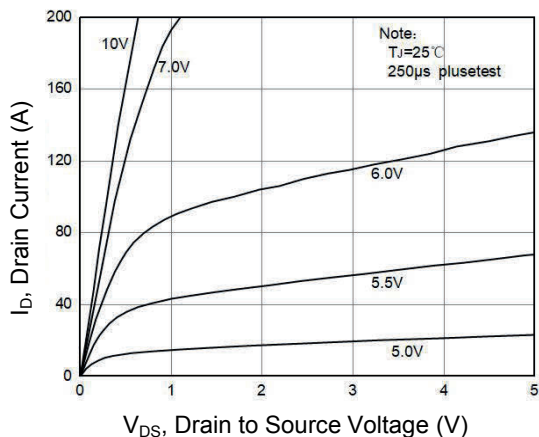


Figure 1. Typical Output Characteristics

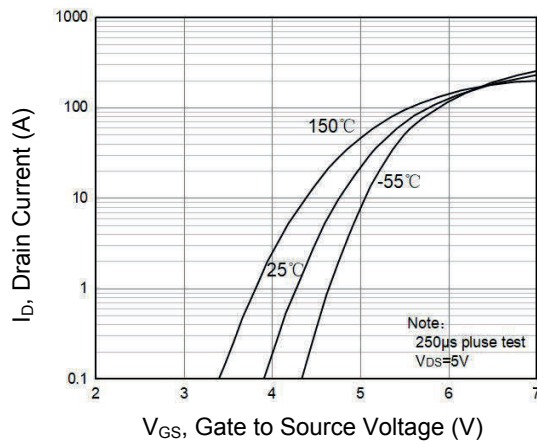


Figure 2. Transfer Characteristics

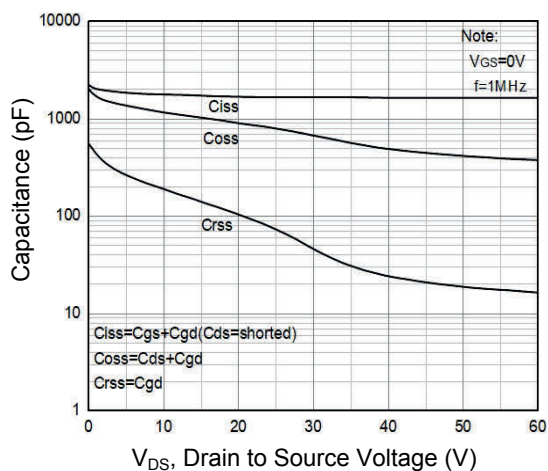


Figure 3. Capacitance Characteristics

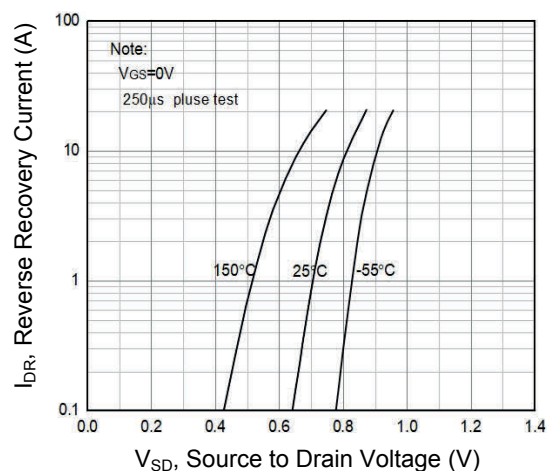


Figure 4. Body Diode Characteristics

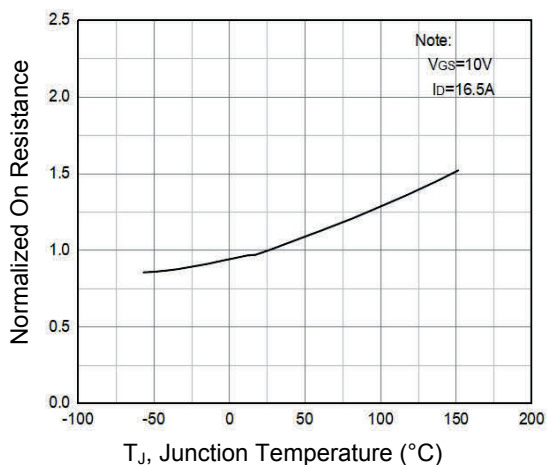


Figure 5. Normalized $R_{DS(ON)}$ vs. T_J

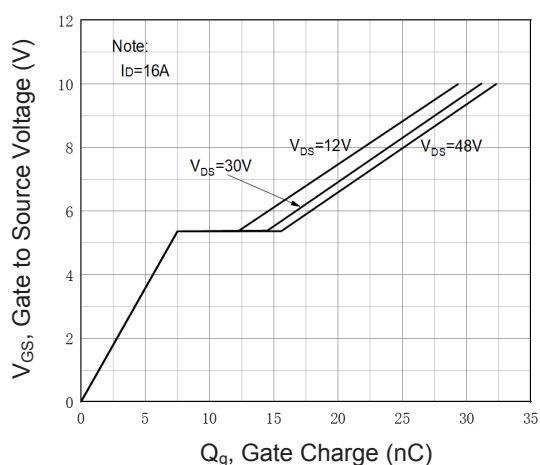


Figure 6. Gate Charge Characteristics

Typical Electrical and Thermal Characteristic Curves

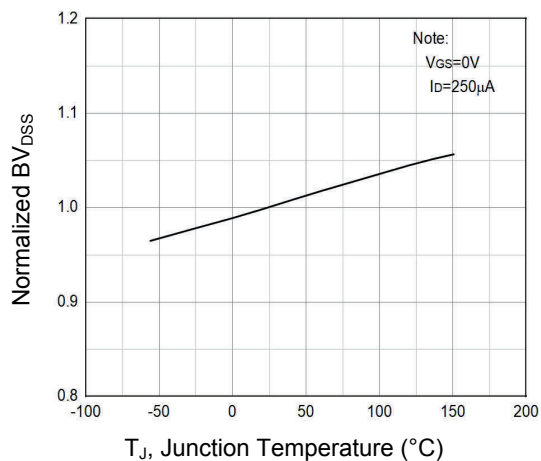


Figure 7. Normalized BV_{DSS} vs. T_J



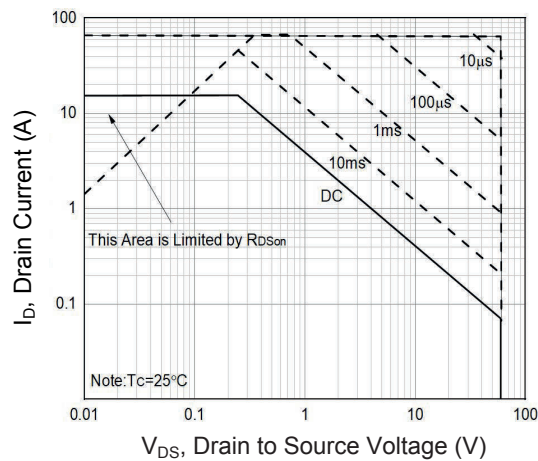


Figure 8. Safe Operation Area

Package Outline Dimensions (PPAK5x6)

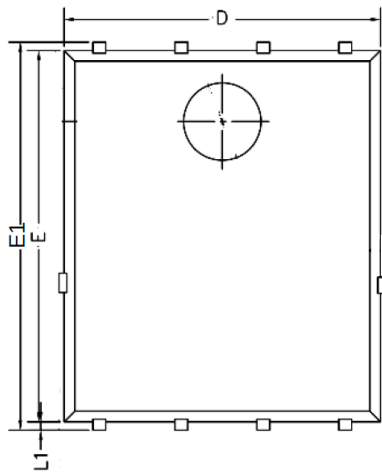

TOP VIEW

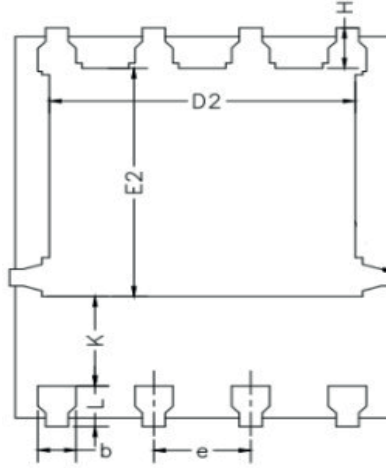

BOTTOM VIEW



SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.20	0.035	0.047
b	0.30	0.55	0.012	0.022
C	0.15	0.35	0.006	0.014
D	4.70	5.20	0.185	0.205
D2	3.76	4.20	0.148	0.165
E2	3.30	3.85	0.130	0.152
E	5.60	5.90	0.220	0.232
E1	5.80	6.20	0.228	0.244
K	1.10	-	0.043	-
H	0.45	0.75	0.018	0.030
L	0.45	0.75	0.018	0.030
L1	0.25	0.45	0.010	0.018
e	1.27 BSC		0.050 BSC	

Order Information

Device	Package	Marking	Carrier	Quantity
GSGP6R206HAU	PPAK5x6	P6R206H	Tape & Reel	5,000 Pcs / Reel