



Features

- 60Watts peak pulse power ($t_p = 8/20\mu s$)
- ECP0201 package
- Snap-Back technology
- Low clamping voltage
- Low leakage current
- Ultra low capacitance (0.35pF typical)
- ESD Protection for high-speed data lines to:
 IEC 61000-4-2 ±22KV contact ±25KV air
 IEC 61000-4-4 (EFT) 40A (5/50ns)
 IEC 61000-4-5 (Lightning) 10A (8/20μs)
- RoHS compliant



ECP0201



Applications

- USB 3.0, USB 2.0, MHL
- HDMI 2.0, Display Port 1.3, eSATA
- Unified Display Interface (UDI)
- Digital Visual Interface (DVI)
- 1G/2.5G/5G/10G Ethernet

Schematic Diagram

Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_P=8/20\mu s$)	P_{PP}	60	W
Peak Pulse Current ($T_P=8/20\mu s$)	I_{PP}	10	A
Junction Temperature	T_J	-55 To +125	°C
Storage Temperature	T_{STG}	-55 To +150	°C

Electrical Characteristics ($T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse Stand-Off Voltage	V_{RWM}	-	-	-	6.5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	8	10	15	V
Reverse Leakage Current	I_R	$V_R=6.5V$	-	0.01	0.05	uA
Trigger Voltage	V_T	$I_{PP}=10A, T_P=8/20\mu s$	-	13	-	V
Clamping Voltage	V_C	$I_{PP}=10A, T_P=8/20\mu s$	-	6	-	V
Dynamic Resistance	R_{DYN}	$I_T=0-30A, T_P=TLP$	-	0.25	-	Ω
Junction Capacitance	C_J	$V_R=0V, f=1MHz$ I/O to GND	-	0.35	0.50	pF

Typical Characteristic Curves

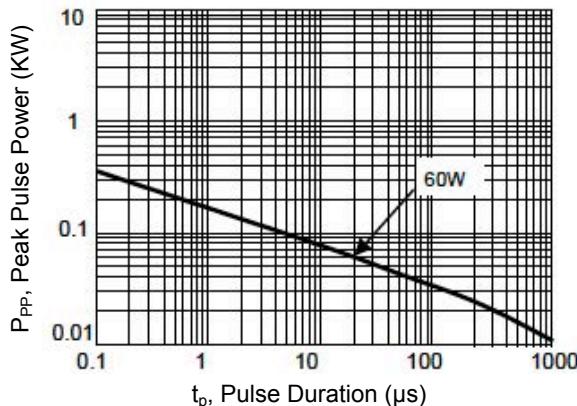


Figure 1. Peak Pulse Power Rating Curve

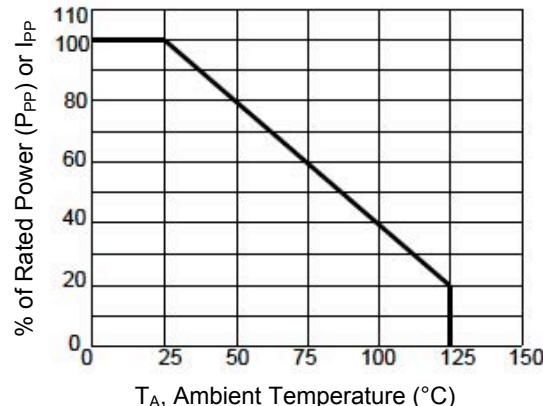


Figure 2. Pulse Derating Curve

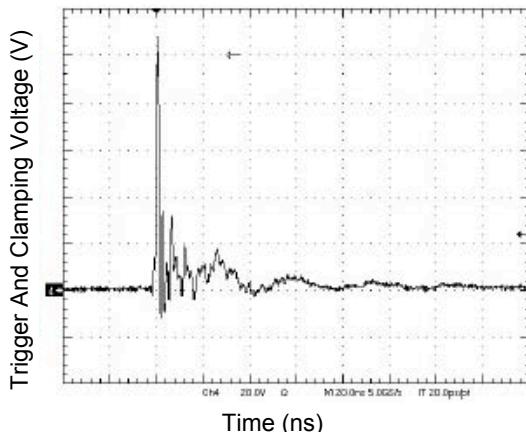


Figure 3. IEC61000-4-2 +8kV Contact Discharge

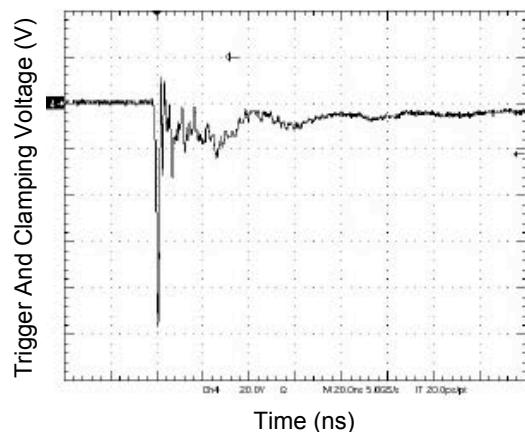


Figure 4. IEC61000-4-2 -8kV Contact Discharge

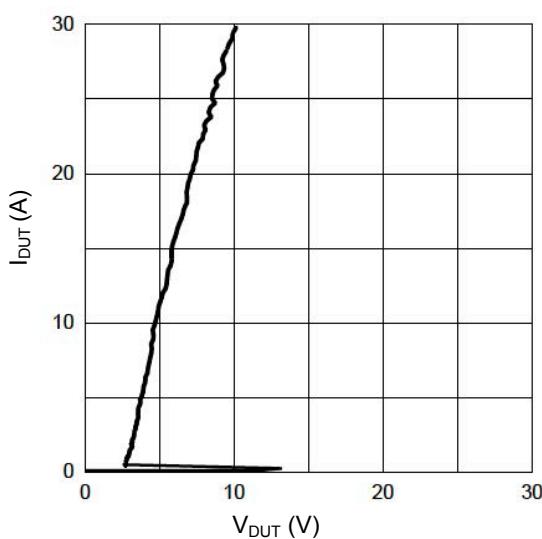


Figure 5. Transmission Line Pulse ($T_p=100\text{ns}$)


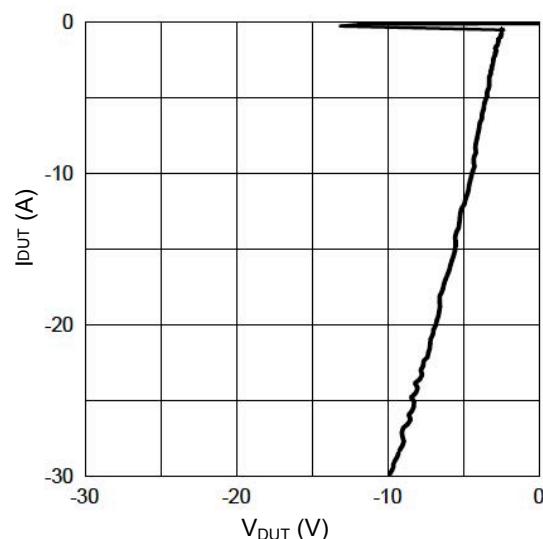


Figure 6. Transmission Line Pulse ($T_p=100\text{ns}$)

Package Outline Dimensions (ECP0201)

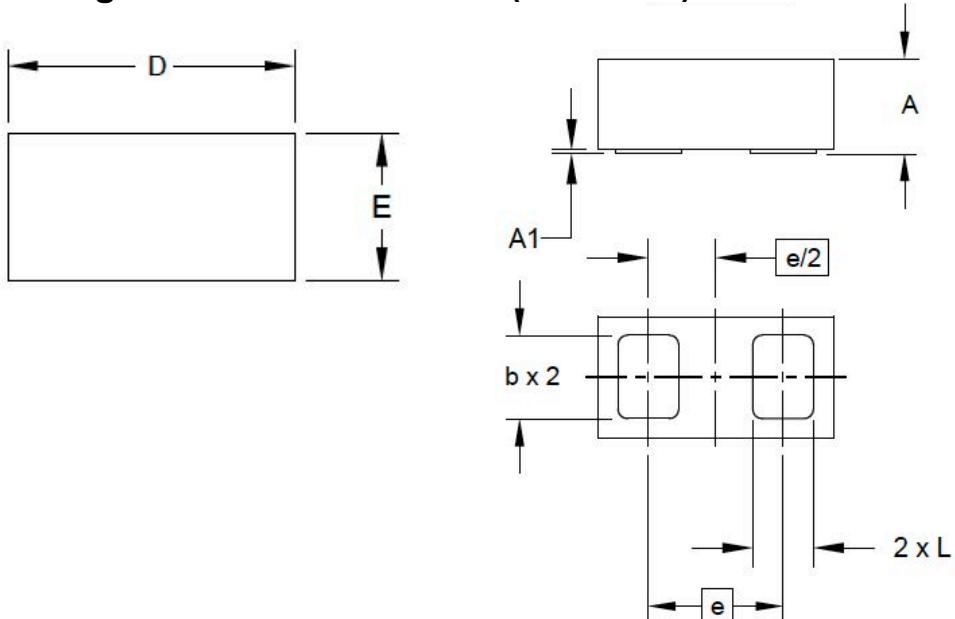

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.185	0.227	0.007	0.009
A1	0.000	0.050	0.000	0.002
b	0.200	0.250	0.008	0.010
D	0.590	0.640	0.023	0.025
E	0.290	0.340	0.011	0.013
e	0.355 BSC		0.014 BSC	
L	0.140	0.180	0.006	0.007

Order Information

Device	Package	Marking	Quantity	HSF Status
GSECA6B0035	ECP0201	O	10,000pcs / Reel	RoHS Compliant