



Features

- Ultra small package: 0.6 x 0.3 x 0.3mm
- Protects one data or power line
- Ultra low leakage: nA level
- Operating voltage: 5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: ±30kV
 - Contact discharge: ±30kV
 - IEC 61000-4-5 (Lightning) 8A (8/20µs)

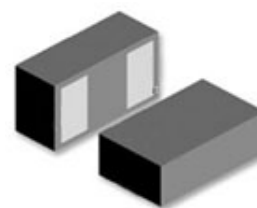

DFN0603



Schematic Diagram

Applications

- Cellular handsets and accessories
- Personal digital assistants
- Notebooks and handhelds
- Portable instrumentation
- Digital cameras
- Peripherals
- Audio players
- Keypads, side keys, LCD displays

Absolute Maximum Ratings (T_A=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20µs)	P _{pk}	100	W
Peak Pulse Current (8/20µs)	I _{pp}	8	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	±30	kV
ESD per IEC 61000-4-2 (Contact)	V _{ESD}	±30	kV
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V _{RWM}	Pin 1 to Pin 2	-	-	5	V
Breakdown Voltage	V _{BR}	I _T =1mA, Pin 1 to Pin 2	6	-	8.5	V
Reverse Leakage Current	I _R	V _{RWM} =5V, Pin 1 to Pin 2	-	-	0.2	µA
Forward Voltage	V _F	I _F =10mA, Pin 2 to Pin 1	-	1.0	1.2	V
Clamping Voltage	V _C	I _{PP} =8A (8 x 20µs pulse), Pin 1 to Pin 2	-	-	12	V
Junction Capacitance	C _J	V _R =0V, f=1MHz	-	60	-	pF

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

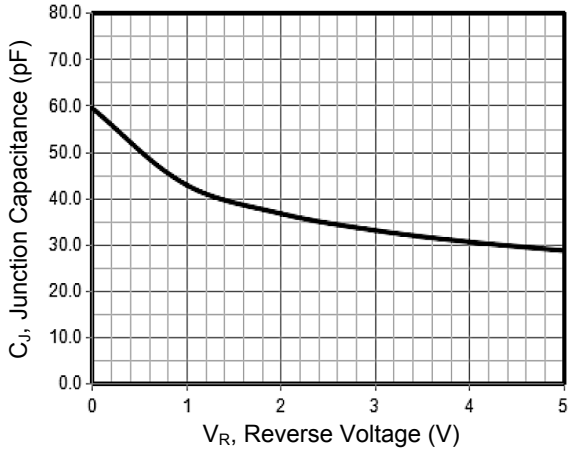


Figure 1. Junction Capacitance vs. Reverse Voltage

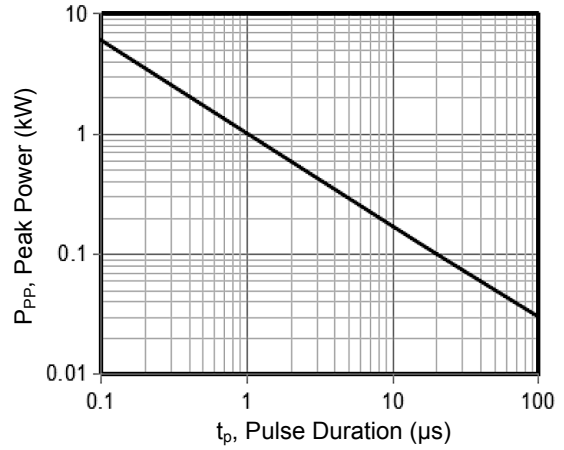


Figure 2. Peak Pulse Power vs. Pulse Time

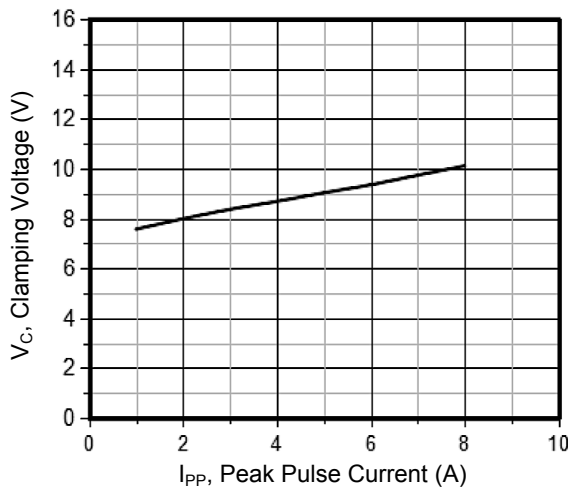


Figure 3. Clamping Voltage vs. Peak Pulse Current

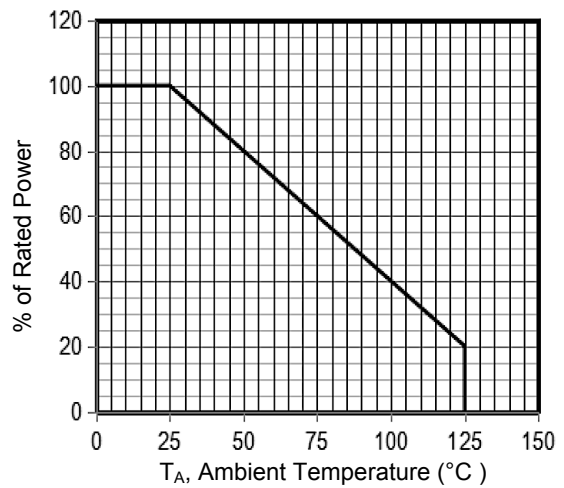


Figure 4. Power Derating Curve


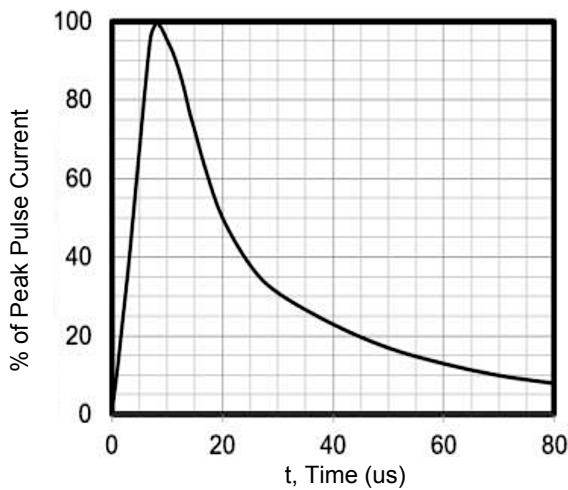



Figure 5. 8 x 20 μs Pulse Waveform

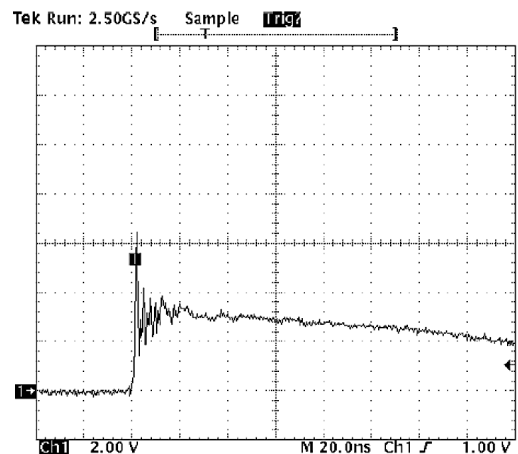

Note: Data is taken with a 10x attenuator


**Figure 6. ESD Clamping Voltage
8kV Contact per IEC 61000-4-2**

Package Outline Dimensions (DFN0603)

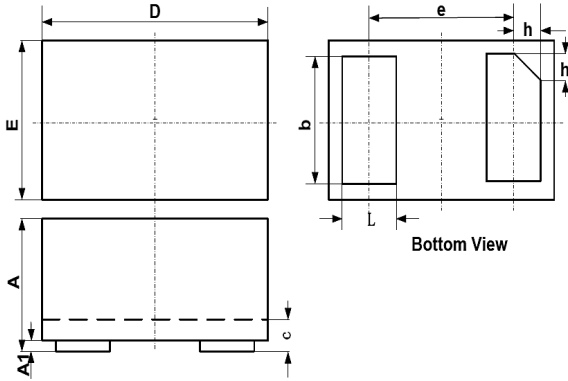

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.230	0.330	0.009	0.013
A1	0.000	0.050	0.000	0.002
b	0.215	0.275	0.008	0.011
c	0.120	0.180	0.005	0.007
D	0.550	0.650	0.022	0.026
e	0.355 BSC		0.014 BSC	
E	0.250	0.350	0.010	0.014
L	0.160	0.220	0.006	0.009
h	0.079 BSC		0.003 BSC	

Recommended Pad Layout

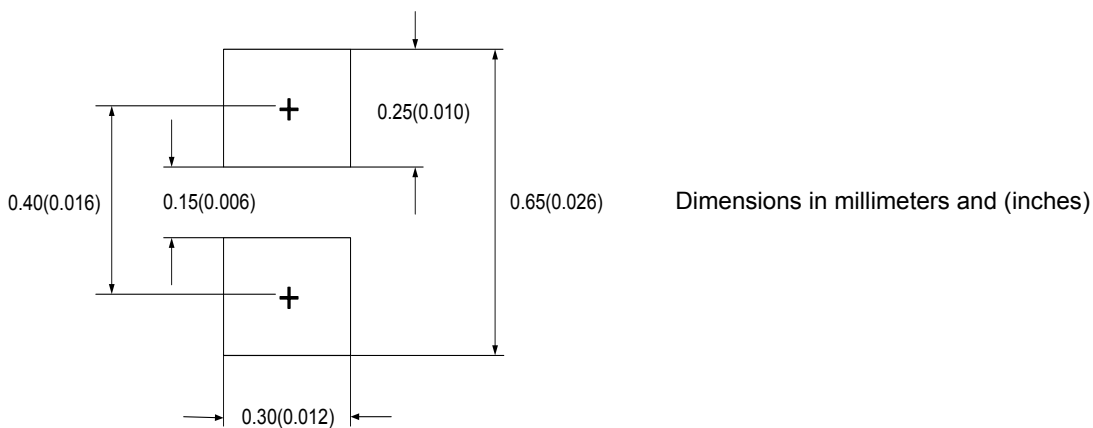

Order Information

Device	Package	Marking	Packaging	SPQ
GSEN5U600	DFN0603	50	Tape & Reel	10,000 Pcs / Reel

For more information, please contact us at: inquiry@goodarksemi.com