


Features

- 160Watts Peak Pulse Power ($T_p = 8/20\mu s$)
- Bi-Directional Configuration
- Snap-Back Technology
- Low Clamping Voltage
- Low Leakage Current
- Ultra Low Capacitance (0.80pF typical)
- ESD Protection for High-Speed Data Lines to:
 IEC 61000-4-2 $\pm 30kV$ Contact, $\pm 30kV$ air IEC
 61000-4-4 (EFT) 40A (5/50ns)
 IEC 61000-4-5 (Lightning) 20A (8/20 μs)
- RoHS Compliant



DFN1006



Schematic Diagram

Applications

- USB 2.0
- Unified Display Interface (UDI)
- Digital Visual Interface (DVI)
- 1G/2.5G Ethernet

Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu S$)	P_{PP}	160	W
Peak Pulse Current ($T_p=8/20\mu S$)	I_{PP}	20	A
Junction Temperature	T_J	-55 To +125	$^\circ C$
Storage Temperature	T_{STG}	-55 To +150	$^\circ C$

Electrical Characteristics ($T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse Stand-Off Voltage	V_{RWM}	-	-	-	3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	5.0	6.5	10	V
Reverse Leakage Current	I_R	$V_R=3.3V$	-	0.01	0.05	μA
Trigger Voltage	V_T	$I_{PP}=20A, T_p=8/20\mu S$	-	12	-	V
Clamping Voltage	V_C	$I_{PP}=20A, T_p=8/20\mu S$	-	10	-	V
Clamping Voltage (TLP 8A)	V_C	IEC 61000-4-2 Level 2 ($\pm 4 kV$ Contact, $\pm 4 kV$ Air)	-	4.5	-	V
Clamping Voltage (TLP 16A)	V_C	IEC 61000-4-2 Level 4 ($\pm 8 kV$ Contact, $\pm 8 kV$ Air)	-	6.0	-	V
Dynamic Resistance	R_{dyn}	$I_T=0$ to 30A, $T_p=TLP$	-	0.25	-	Ω
Junction Capacitance	C_J	$V_R=0V, f=1MHz, I/O$ to GND	-	0.8	1.5	pF

Typical Characteristic Curves

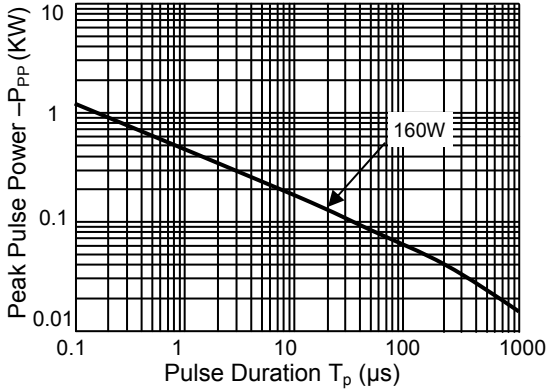


Figure 1. Peak Pulse Power Rating Curve

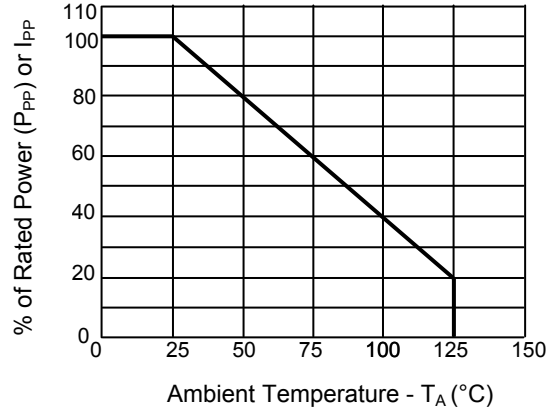


Figure 2. Pulse Derating Curve

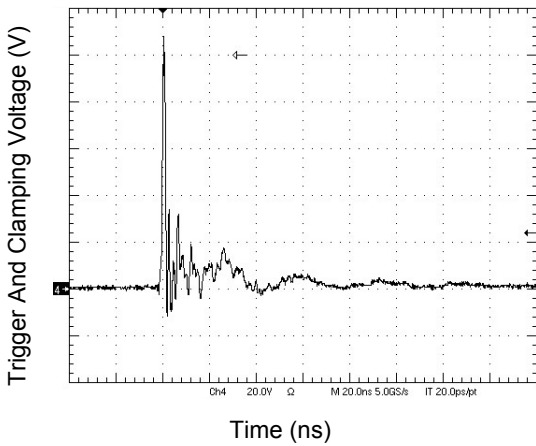


Figure 3. IEC61000-4-2 +8kV Contact Discharge

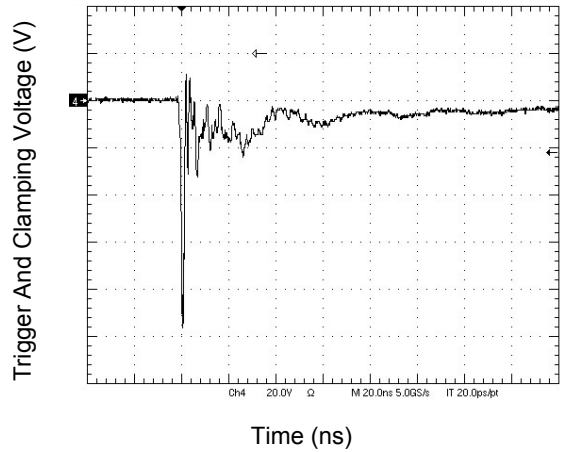


Figure 4. IEC61000-4-2 -8kV Contact Discharge

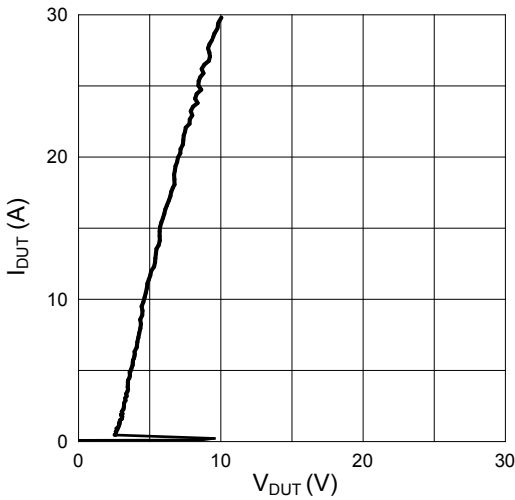


Figure 5. Transmission Line Pulse ($T_p=100ns$)




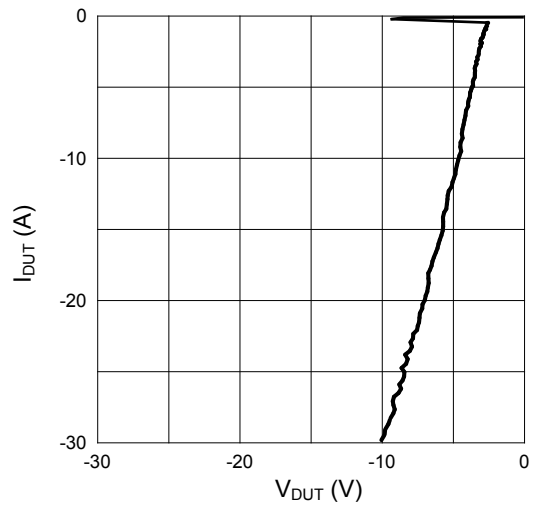


Figure 6. Transmission Line Pulse ($T_p=100ns$)

Product Dimensions DFN1006



Symbol	Milimeter		
	min	nom	max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
A	0.45	0.50	0.55
b	0.45	0.50	0.55
L	0.20	0.25	0.30
e	0.65BSC		



Order Information

Device	Package	Marking	Carrier	Quantity	HSF Status
GSEZ3B008	DFN1006	X	Tape & Reel	10,000pcs	RoHS Compliant