


Features

- Ultra small package: 1.0x0.6x0.5mm
- Protects one data or power line
- Ultra low leakage: nA level
- Operating voltage: 7V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-5 (Lightning) 6A (8/20 μs)
- RoHS compliant



DFN1006

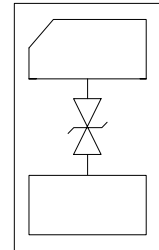

Schematic Diagram

Applications

- Cellular handsets and accessories
- Personal digital assistants
- Notebooks and handhelds
- Portable instrumentation
- Digital cameras
- Peripherals
- Audio players
- Keypads, side keys, LCD displays

Absolute Maximum Ratings (T_A=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P _{pk}	80	W
Peak Pulse Current (8/20 μs)	I _{pp}	6	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 30	kV
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V _{RWM}	-	-	-	7	V
Breakdown Voltage	V _{BR}	I _T =1mA	7.5	-	-	V
Reverse Leakage Current	I _R	V _{RWM} =7V	-	-	0.2	μA
Clamping Voltage	V _C	I _{pp} =1A	-	-	10	V
		I _{pp} =6A	-	-	14	
Junction Capacitance	C _J	V _R =0V, F=1MHz	-	15	-	pF

Typical Performance Characteristic ($T_A=25^\circ\text{C}$ unless otherwise Specified)

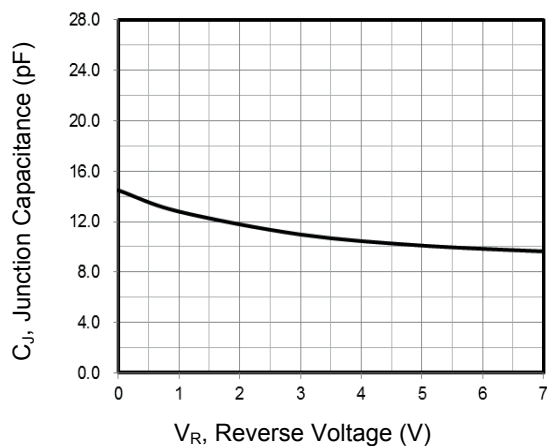


Figure 1. Junction Capacitance vs. Reverse Voltage

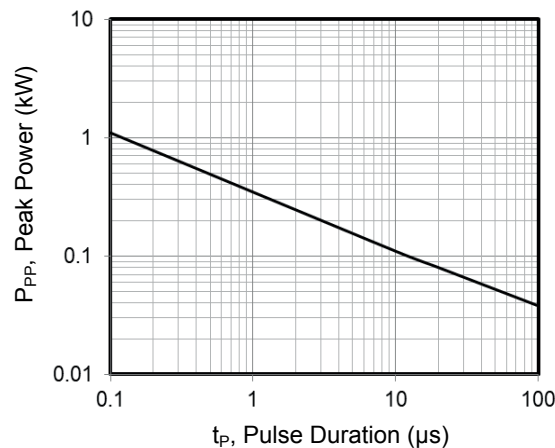


Figure 2. Peak Pulse Power vs. Pulse Time

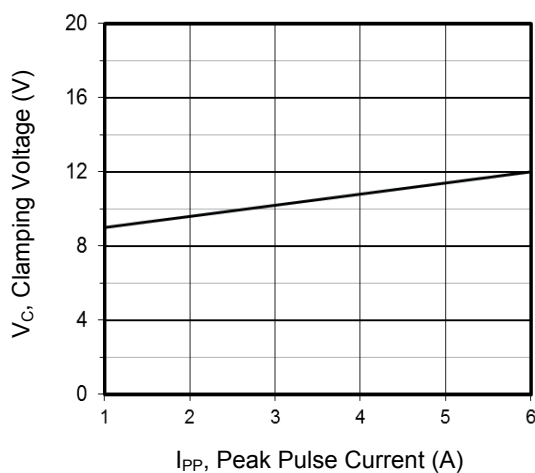


Figure 3. Clamping Voltage vs. Peak Pulse Current
($t_p=8/20\mu\text{s}$)

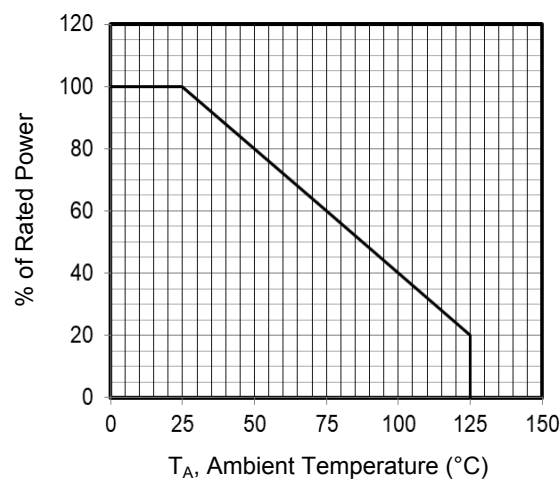


Figure 4. Power Derating Curve


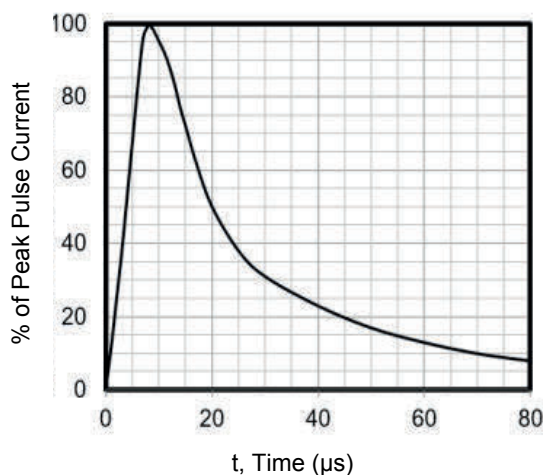



Figure 5. 8 X 20 μs Pulse Waveform

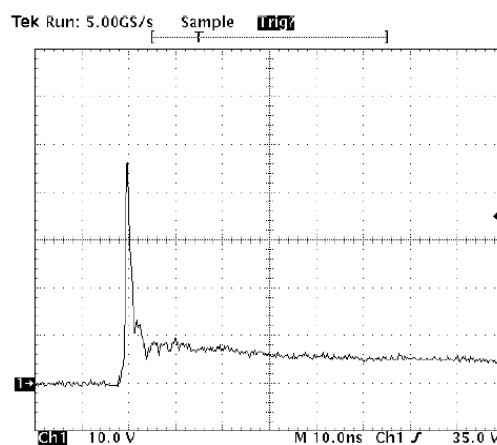

Note: Data is Taken With a 10x Attenuator


Figure 6. ESD Clamping Voltage
8 kV Contact per IEC61000-4-2

Package Outline Dimensions (DFN1006)

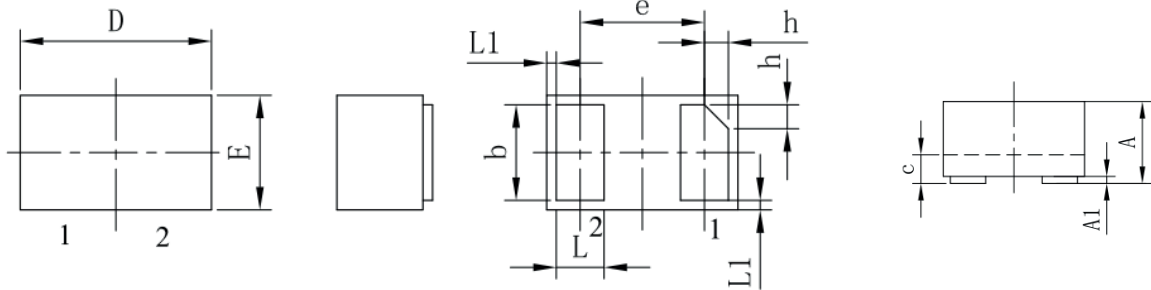

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.45	0.55	0.018	0.022
A1	0.00	0.05	0.000	0.002
b	0.45	0.55	0.018	0.022
c	0.12	0.18	0.005	0.007
D	0.95	1.05	0.037	0.041
e	0.65 BSC		0.026 BSC	
E	0.55	0.65	0.022	0.026
L	0.20	0.30	0.008	0.012
L1	0.05 REF		0.002 REF	
h	0.07	0.17	0.003	0.007

Recommended Pad Layout

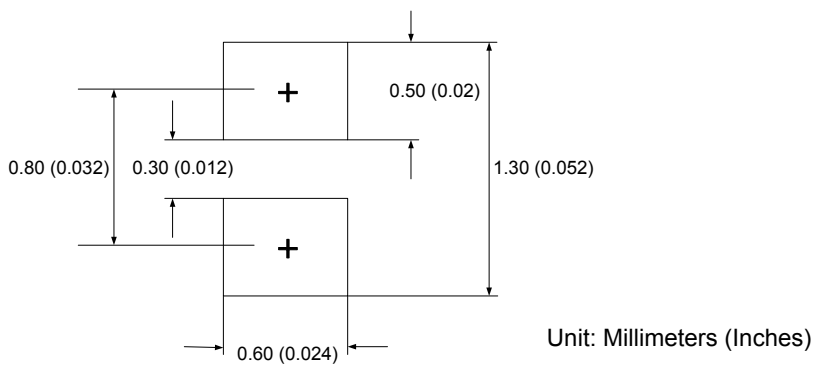

Order Information

Device	Package	Marking	Carrier	Quantity
GSEZ7B150	DFN1006	B2	Tape & Reel	10,000pcs / Reel