

GROAA thru GROMA

Surface Mount Glass Passivated Fast Recovery Rectifiers
 Reverse Voltage 50V to 1000V Forward Current 1.5A

Features

- Glass passivated fast recovery rectifiers
- Ideal for automated placement
- Low forward voltage drop
- High current capability
- Low reverse leakage current
- Solder dip 260 °C, 10s
- Solderability 245°C, 5sec.
- Moisture sensitivity: level 1, per J-STD-020



DO-214AC (SMA)

Applications

For use of fast switching rectification in lighting, cellular phone, portable device, power supplies and other consumer applications.

Maximum Ratings (T_A=25 °C unless otherwise noted)

Parameter	Symbol	GROAA	GROBA	GRODA	GROGA	GROJA	GROKA	GROMA	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _{F(AV)}	1.5							A
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed On Rated Load	I _{FSM}	50							A
Storage Temperature Range	T _{STG}	- 55 to + 150							°C
Operating Junction Temperature Range	T _J	- 55 to + 150							°C

Electrical Characteristics (T_A=25 °C unless otherwise noted)

Parameter	Test Conditions	Symbol	GROAA	GROBA	GRODA	GROGA	GROJA	GROKA	GROMA	Unit
Maximum Instantaneous Forward Voltage	1.5A	V _F	1.3							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A =25°C	I _R	5							µA
	T _A =125°C	I _R	200							
Maximum Reverse Recovery Time	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	t _{rr}	150				250	500		nS
Typical Junction Capacitance	4.0 V, 1 MHz	C _J	11							pF
Typical Thermal Resistance ¹	Junction to Ambient	R _{θJA}	55							°C/W
	Junction to Lead	R _{θJL}	18							
	Junction to Case	R _{θJC}	30							

Note:

1. The thermal resistance from junction to lead, mounted on P.C.B with 5×5mm copper pads, 2 OZ, FR4 PCB

Ratings and Characteristics Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

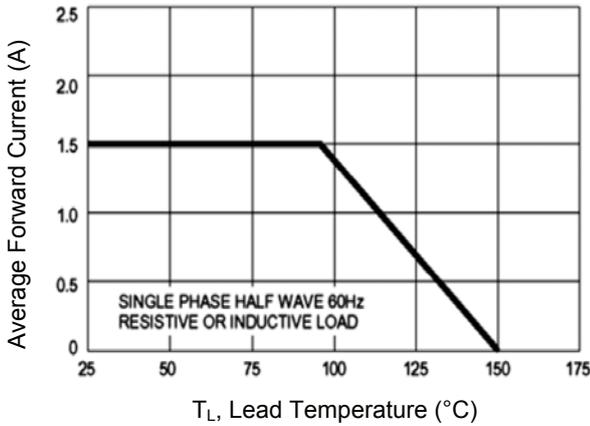


Figure 1. Forward Current Derating Curve

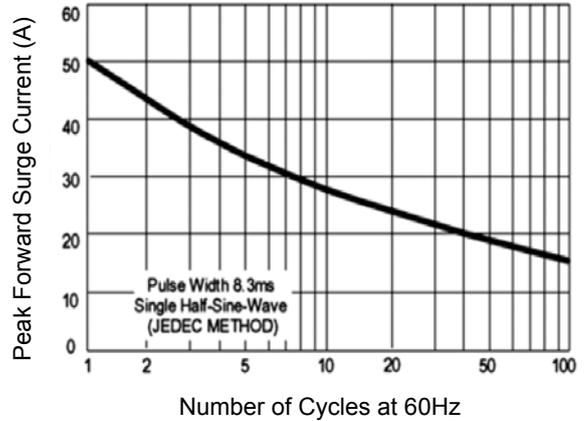


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

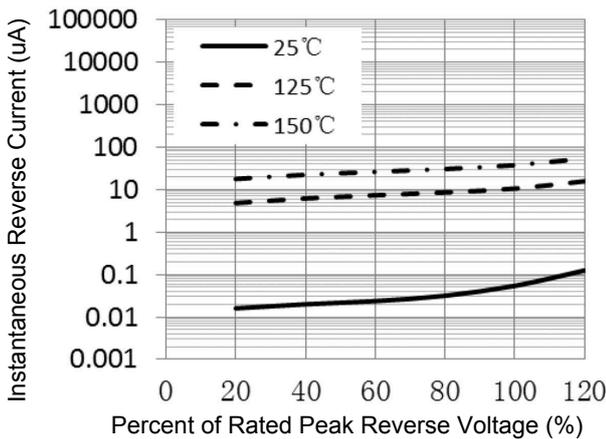


Figure 3. Typical Reverse Characteristics

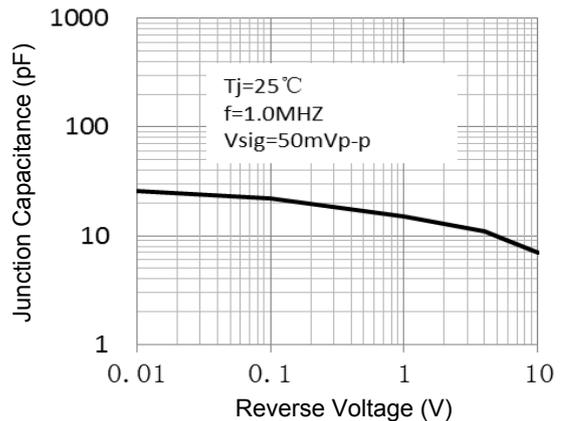


Figure 4. Typical Junction Capacitance


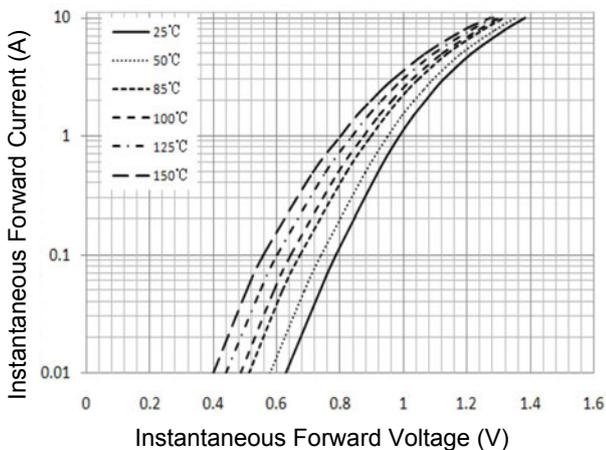


Figure 5. Typical Instantaneous Forward Characteristics

GROAA thru GROMA


Surface Mount Glass Passivated Fast Recovery Rectifiers
 Reverse Voltage 50V to 1000V Forward Current 1.5A

Package Outline Dimensions DO-214AC (SMA)

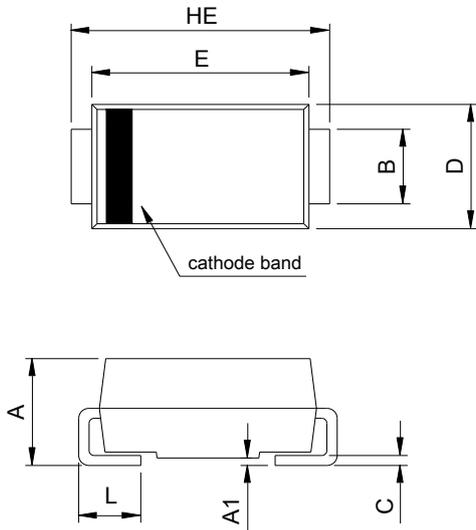

SMA (DO-214AC)				
DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.90	2.30	0.075	0.091
A1	0.00	0.20	0.000	0.008
B	1.25	1.65	0.049	0.065
C	0.15	0.31	0.006	0.012
D	2.35	2.90	0.093	0.114
E	3.99	4.60	0.157	0.181
HE	4.80	5.30	0.189	0.209
L	0.76	1.52	0.030	0.060

Recommended Pad Layout

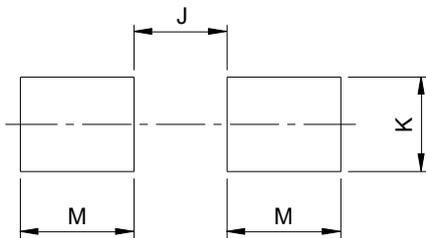

Recommended Pad Layout (Reference ONLY)				
DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	-	2.20	-	0.087
K	1.72	-	0.068	-
M	2.00	-	0.079	-