


Features

- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Low forward voltage, high efficiency
- Guarding for over voltage protection
- For use in low voltage, high frequency inverters
- Free wheeling and polarity protection applications



CASE:TO-220F-AB



1. Anode 2.Cathode 3. Anode

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All external surfaces corrosion resistant and terminal leads are readily solderable
- Lead temperature for soldering purposes: 260°C Max. for 10 sec
- Shipped 50 units per plastic tube

Maximum Ratings and Electrical Characteristics (TC=25°C unless otherwise noted)

PARAMETER	TEST CONDITIONS		SYMBOL	MBRF2020CT	UNIT
Maximum repetitive peak reverse voltage			VRRM	200	V
Working peak reverse voltage			VRWM	200	V
Maximum DC blocking voltage			VDC	200	V
Maximum average forward rectified current at Tc=105°C total Device per Diode			IF(AV)	20 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode			IFSM	150	A
Peak repetitive reverse current per leg at tp=2.0us , 1KHz			IRRM	1.0	A
Voltage rate of change (rated VR)			DV/dt	10000	V/us
Operating junction temperature range			TJ	-55 to+150	°C
Storage temperature range			TSTG	-55 to+150	°C
Isolation voltage (TO220F-AB only) from terminal to heatsink t = 1 sec			VAC	1500	V
Maximum instantaneous forward voltage per leg	IF=10A IF=10A	TC=25°C TC=125°C	VF	0.94 0.85	V
Maximum reverse current per leg at working peak Reverse voltage	TJ=25°C TJ=100°C		IR	400 15	uA mA

Thermal Characteristics Ta=25°C unless otherwise noted

Symbol	Parameter	Max	Unit
RθJC	Thermal Resistance, Junction to Case per Leg	4.0	°C /W
RθJA	Thermal Resistance, Junction to Ambient per Leg	62.5	°C /W

Note:

1. Screw mounting with 4-40 screw, where washer diameter is ≤4.9mm(0.19 ")
2. Pulse test: 300us pulse width, 1% duty cycle

Rating and Characteristic Curves (Tc=25°C Unless otherwise noted)

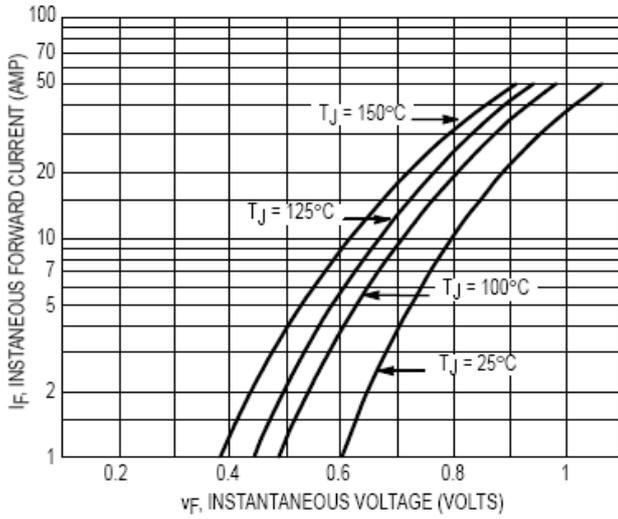


Figure 1. Typical Forward Voltage (Per Leg)

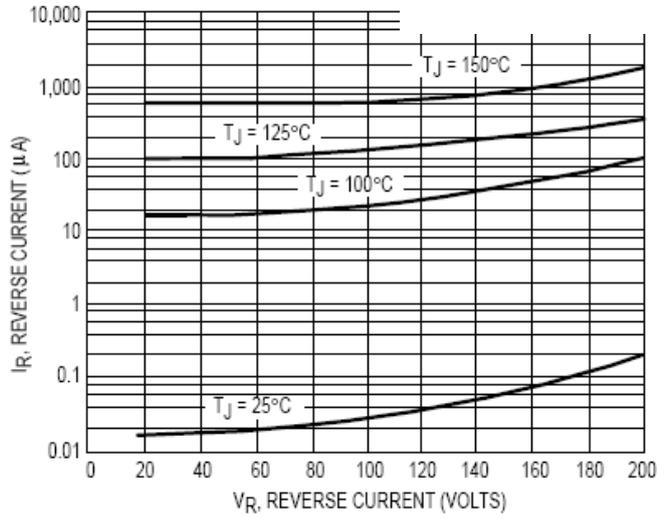


Figure 2. Typical Reverse Current (Per Leg)

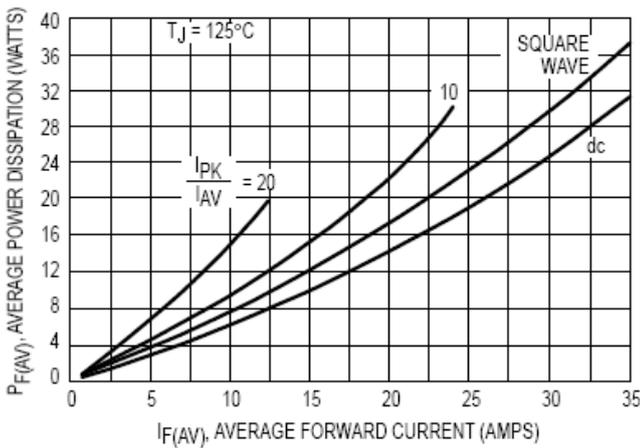


Figure 3. Forward Power Dissipation

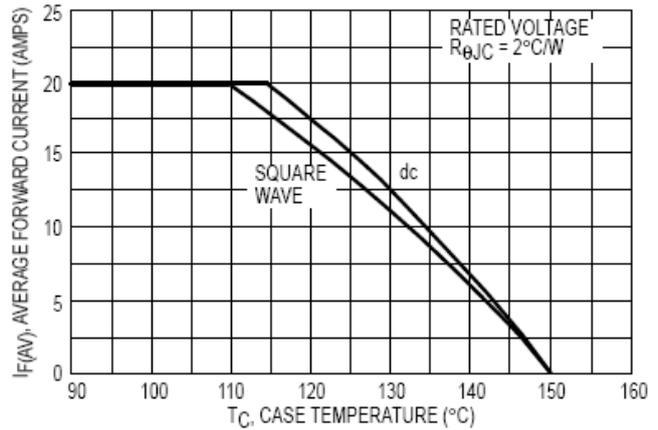


Figure 4. Current Derating, Case

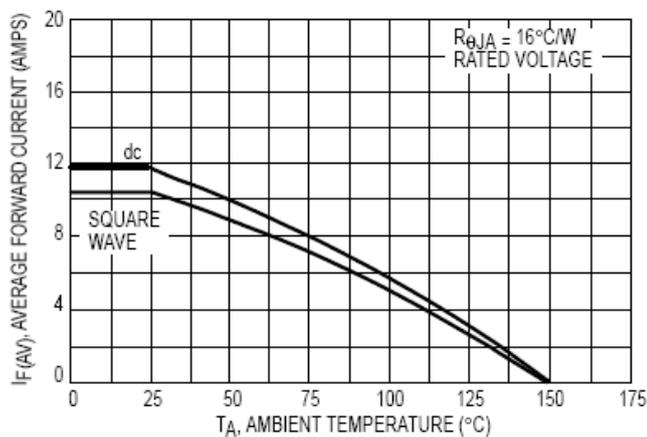


Figure 5. Current Derating, Ambient


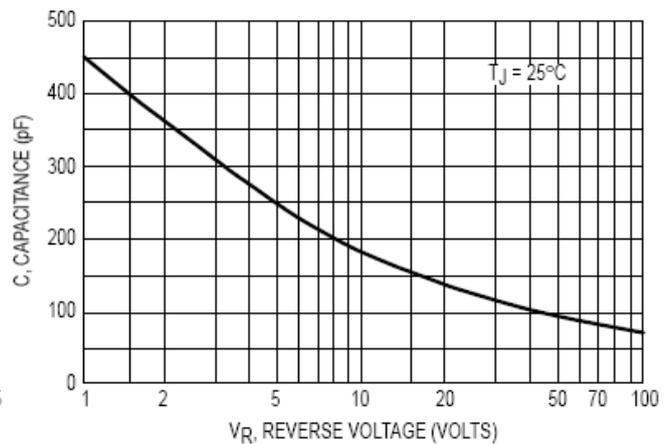



Figure 6. Typical Capacitance (Per Leg)

Package Outline (TO-220F-AB) UNIT:MM

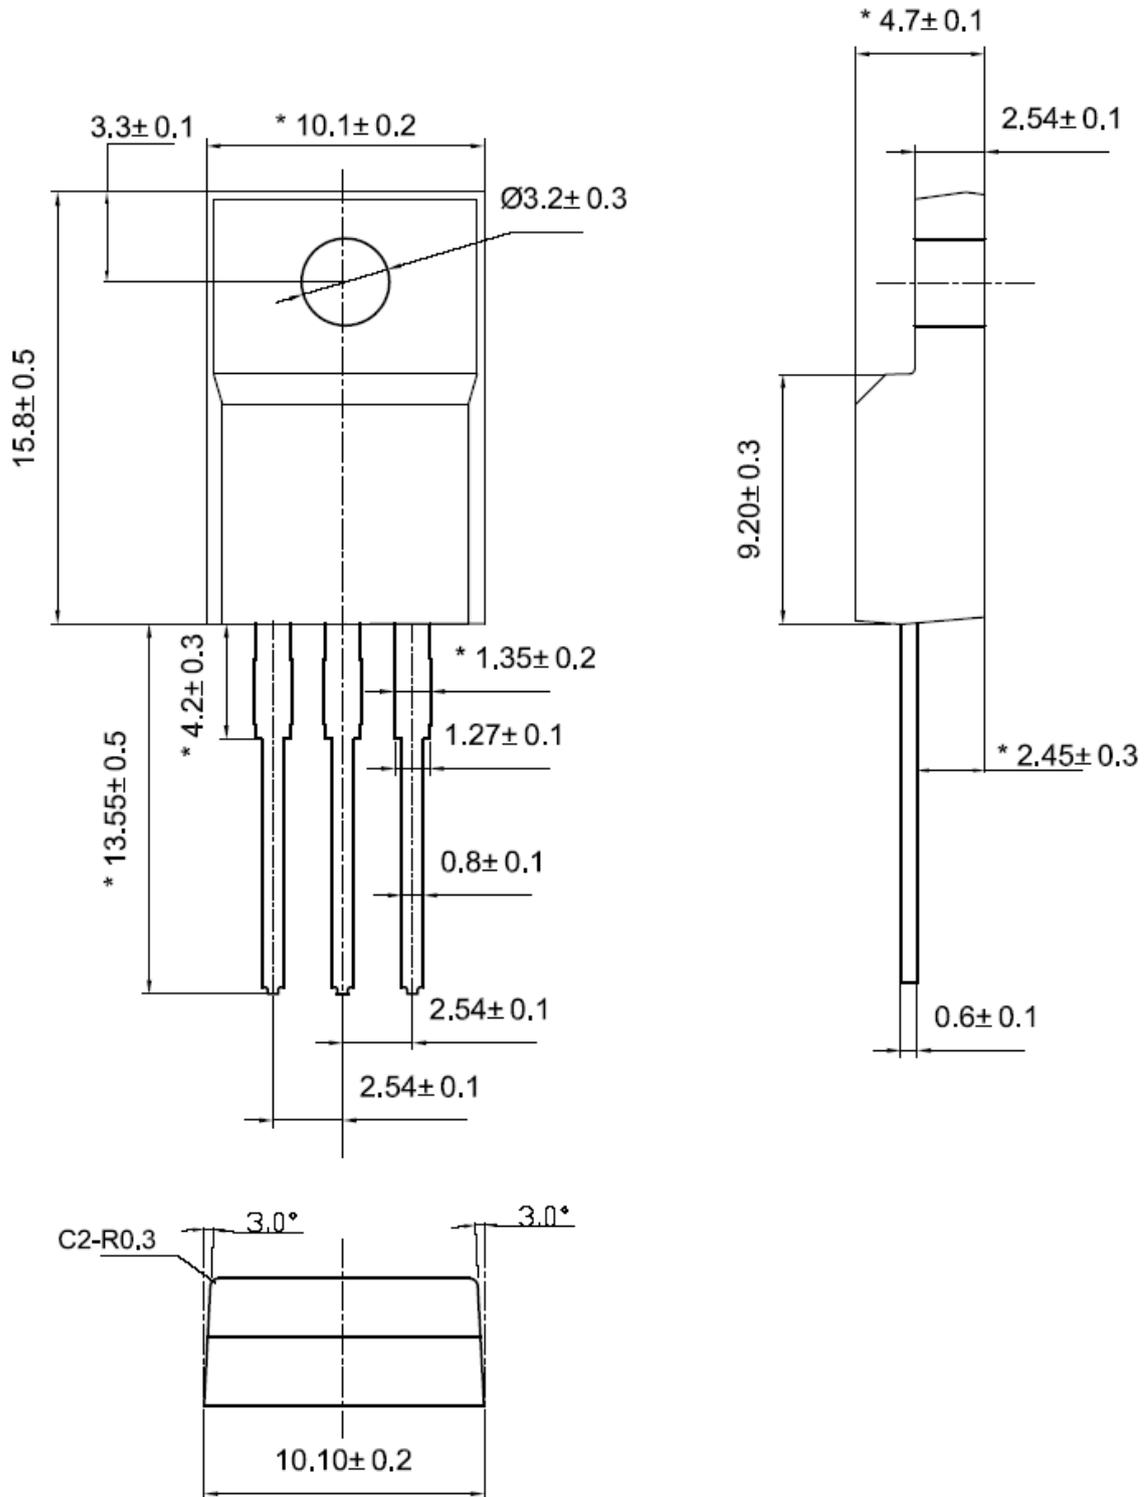

Lead Frame Material : Copper Plating: Pure Tin Plating

MARKING

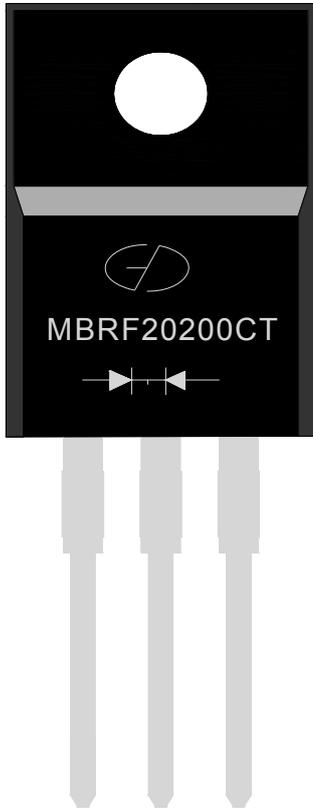

1. Part Name : MBRF20200CT
2. Logo Mark: 
3. Polarity: 