


# GLV1506 thru GLV1508


Glass Passivated Bridge Rectifiers  
 Reverse Voltage 600 to 800V Forward Current 15A

## Features

- Glass passivated chip junction
- Thin single in-line package
- Ideal for printed circuit boards
- High surge current capability
- High case dielectric strength of 2500 V<sub>RMS</sub>
- Low forward voltage drop
- Solder dip 260 °C, 10s
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

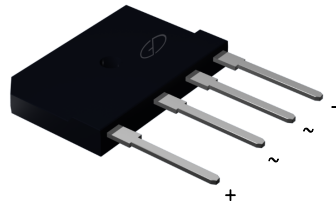

Package: GBJ(5S)

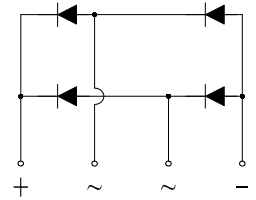

Schematic Diagram

## Mechanical Data

- Case: GBJ(5S), molded epoxy body , Epoxy meets UL 94V-0 flammability rating
- Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22B-106
- Polarity: As marked on body
- Mounting Torque: 10cm·kg(8.8 inches·lbs)maximum
- Recommended Torque: 5.7cm·kg(5 inches·lbs)



## Applications

General purpose used in AC-DC full wave rectification for switching power supplies, home appliances, office equipment and industrial automotive applications.

## Maximum Ratings (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	GLV1506	GLV1508	Unit
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	600	800	V
Maximum RMS Voltage	V <sub>RMS</sub>	420	560	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	600	800	V
Maximum Average Forward Rectified Output Current at	T <sub>C</sub> =125°C <sup>(1)</sup>	I <sub>F(AV)1</sub>	15	A
	T <sub>A</sub> =25°C <sup>(2)</sup>	I <sub>F(AV)2</sub>	3.7	
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load, JEDEC Method)	I <sub>FSM</sub>	400		A
Dielectric Strength (terminals to case, AC)	V <sub>ISO</sub>	2500		V
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	- 55 to + 150		°C

Notes: (1) Unit case mounted with heatsink

(2) Unit case mounted on PCB without heatsink

## Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	GLV1506	GLV1508	Unit
Maximum Thermal Resistance	R <sub>θJC</sub> <sup>(1)</sup>	1.0		°C/W
	R <sub>θJA</sub> <sup>(2)</sup>	25		

Notes: (1) Thermal resistance from junction to case, Unit case mounted with heatsink

(2) Thermal resistance from junction to ambient, Unit case mounted on PCB without heatsink

## Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Test Conditions	Symbol	GLV1506	GLV1508	Unit
Maximum Instantaneous Forward Voltage Drop per Leg	$I_F = 7.5\text{ A}$	$T_A = 25^\circ\text{C}$	0.89		V
		$T_A = 125^\circ\text{C}$	0.82		
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$	$I_R$	5		$\mu\text{A}$
	$T_A = 125^\circ\text{C}$		250		
Typical Reverse Recovery Time	$I_F = 0.5\text{ A}, I_R = 1.0\text{ A}, I_{rr} = 0.25\text{ A}$	$T_{RR}$	4.7		$\mu\text{s}$

## Ratings and Characteristics Curves

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

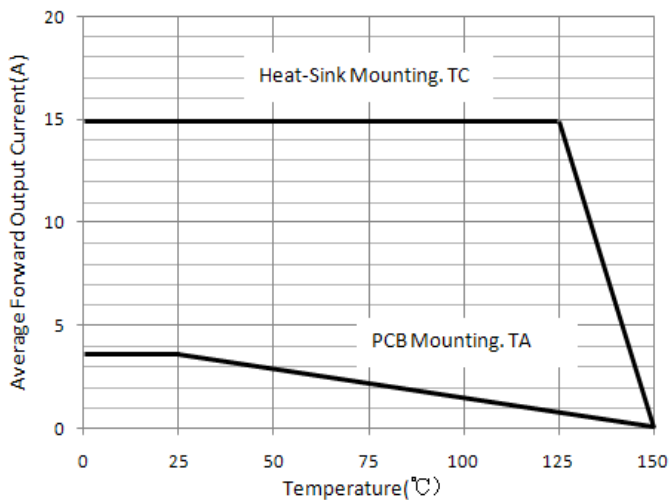


Figure 1. Derating Curve Output Rectified Current

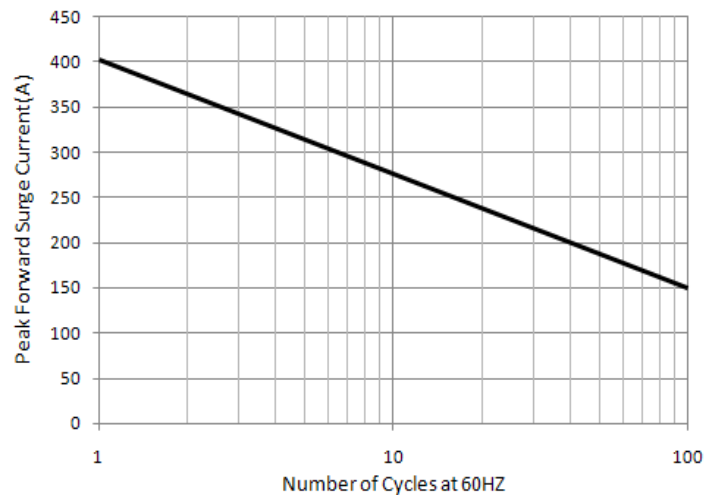


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

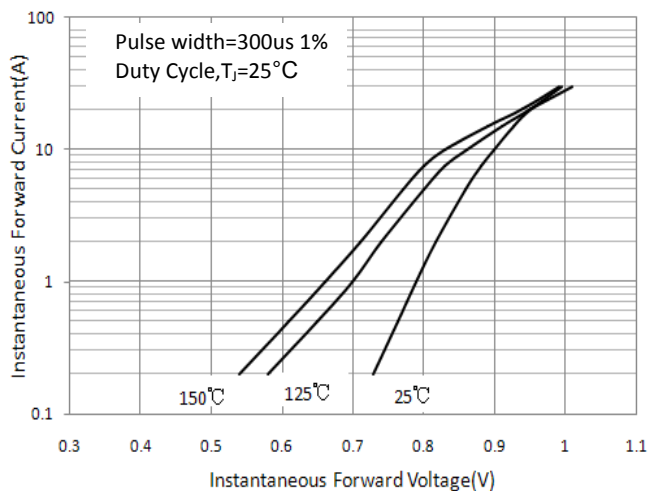


Figure 3. Typical Forward Characteristics Per Leg

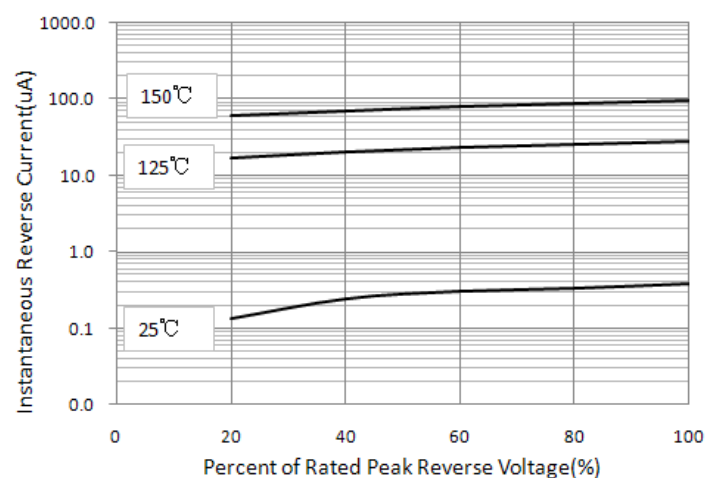


Figure 4. Typical Reverse Characteristics Per Leg

# GLV1506 thru GLV1508

Glass Passivated Bridge Rectifiers  
 Reverse Voltage 600 to 800V Forward Current 15A


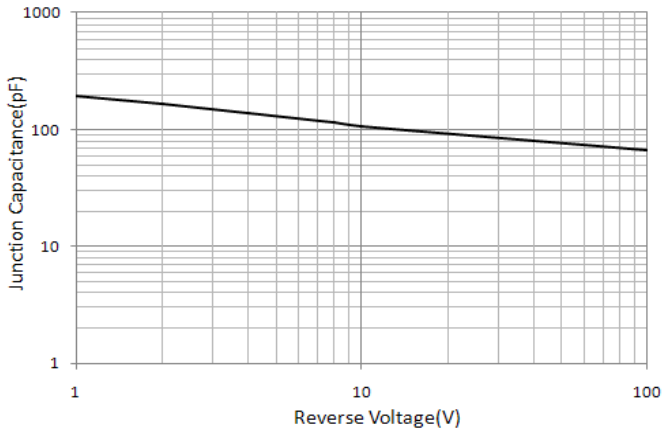


Figure 5. Typical Junction Capacitance Per Leg

## Package Outline Dimensions

in millimeters

GBJ(5S)

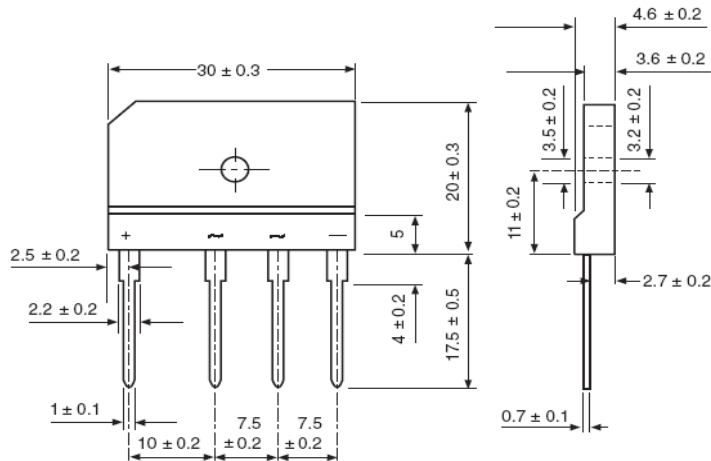

## Ordering Information (example)

P/N	Unit Weight (g)	Base Quantity	Delivery Mode
GLV1506	7.141	20	Tube
GLV1506	7.141	40	Paper tray