


GSGBU1501 thru GSGBU1510


General Purpose Bridge Rectifiers
Reverse Voltage 100V to 1000V Forward Current 15.0A

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- High current capability
- Low forward voltage drop
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU



Package: GBU



Schematic Diagram

Mechanical Data

- Case: GBU molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting position: Any

Applications

Used in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, charger, home appliances, office equipment and telecommunication applications.

Maximum Ratings and Electrical Characteristics

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load. For capacitive load, derate current by 20%.)

Parameters		Symbol	GSGBU 1501	GSGBU 1502	GSGBU 1504	GSGBU 1506	GSGBU 1508	GSGBU 1510	Units
Maximum Reverse Peak Reverse Voltage		V _{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage		V _{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage		V _{DC}	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current, (See Fig 2)		I _{F(AV)}	15.0						A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load		I _{FSM}	240						A
Rating for Fusing (t=8.3ms)		I ² t	239						A ² S
Maximum Instantaneous Forward Voltage at 7.5A DC		V _F	1.00						V
Maximum DC Reverse Current at Rated DC blocking Voltage	T _J =25°C	I _R	5						μA
	T _J =125°C		100						μA
Typical Junction Capacitance ¹		C _J	70						pF
Typical Thermal Resistance, Junction-Ambient ²		R _{θJA}	25						°C/W
Typical Thermal Resistance, Junction-Case ²		R _{θJC}	1.8						°C/W
Operating Temperature Range		T _J	-55 to +150						°C
Storage Temperature Range		T _{STG}	-55 to +150						°C

Notes:

1. Measured at 1MHz and applied reverse voltage of 4.0 Volts.
2. Unit mounted on 75mm x 45mm x 5.5mm AL plate heatsink

Ratings and Characteristics Curves

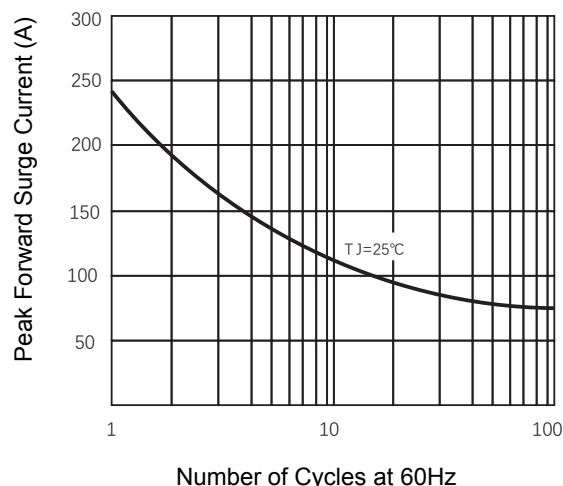


Figure 1. Maximum Forward Surge Current

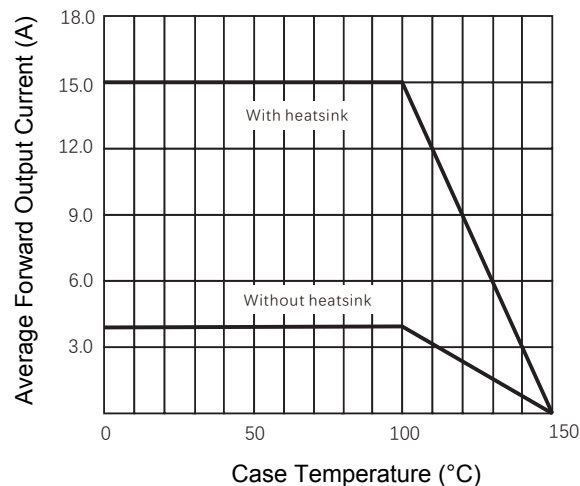


Figure 2. Forward Current Derating Curve

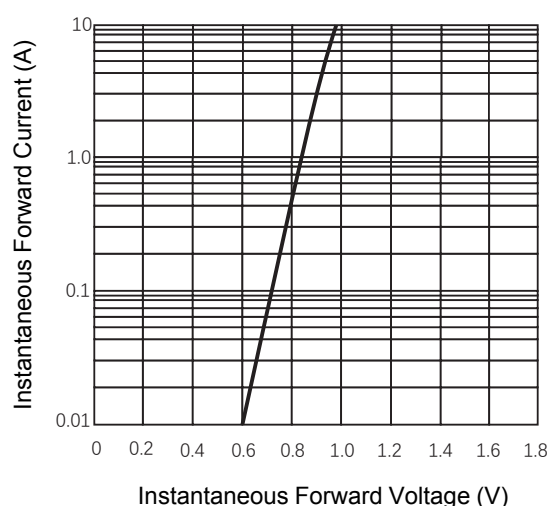


Figure 3. Typical Forward Characteristics


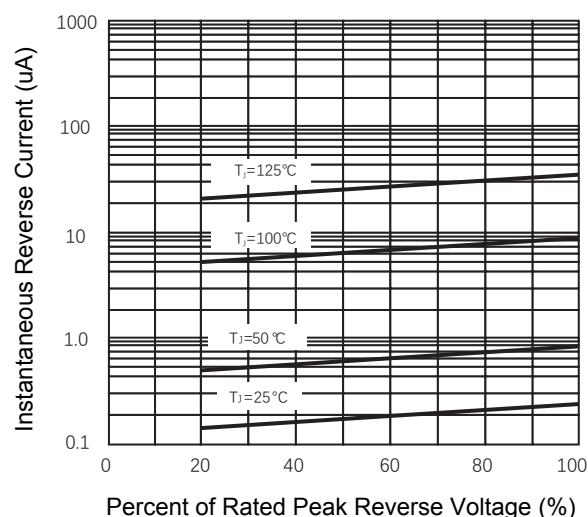


Figure 4. Typical Reverse Characteristics

Package Outline Dimensions (GBU)

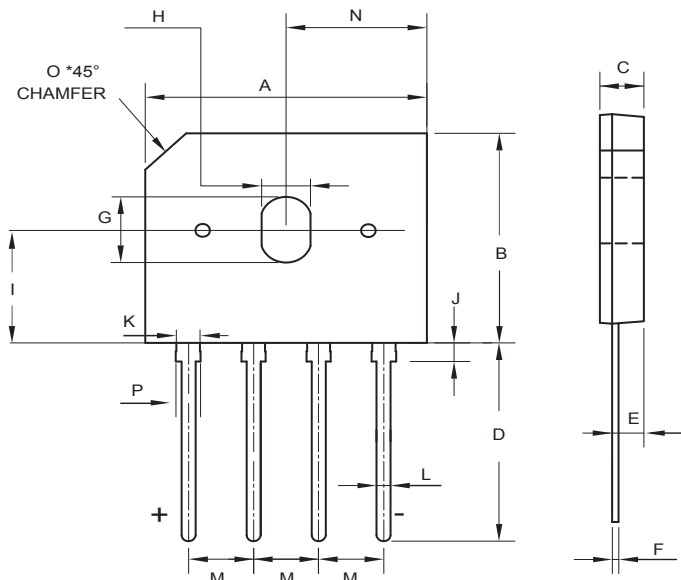

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	21.80	22.20	0.860	0.874
B	18.30	18.70	0.720	0.736
C	3.35	3.55	0.132	0.140
D	17.50	18.50	0.689	0.728
E	2.30	2.70	0.091	0.106
F	0.42	0.52	0.017	0.020
G	5.50	6.30	0.217	0.248
H	3.50	4.10	0.138	0.161
I	9.50	10.50	0.374	0.413
J	2.40	2.60	0.094	0.102
K	2.05	2.25	0.081	0.089
L	1.05	1.25	0.041	0.049
M	4.83	5.33	0.190	0.210
N	10.90	11.10	0.430	0.437
O	3.20 TYP		0.126 TYP	
P	2.15	2.35	0.085	0.093

Order Information

Device	Package	Marking	Carrier	Quantity
GSGBU1501	GBU	GBU1501	Tube	20pcs / Tube
GSGBU1502	GBU	GBU1502	Tube	20pcs / Tube
GSGBU1504	GBU	GBU1504	Tube	20pcs / Tube
GSGBU1506	GBU	GBU1506	Tube	20pcs / Tube
GSGBU1508	GBU	GBU1508	Tube	20pcs / Tube
GSGBU1510	GBU	GBU1510	Tube	20pcs / Tube