


Features

- Low Profile and Small Footprint
- User Selectable Data Output Rate
- Digital I²C Output Interface
- High Resolution
- Low Power Consumption
- One Programmable Interrupt Generator Operating Independently for Motion Detection
- Embedded Self-Test Function
- Factory Programmable Offset and Sensitivity
- RoHS Compliant

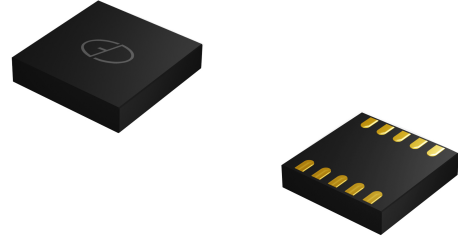

PACKAGE: LGA-10
3 x 3 x 0.9mm
(LxWxH max value in mm)

Applications

- User Interface for Mobile and PMP
- Display Orientation
- Gesture Recognition
- Active/Inactive Monitoring
- Free-fall Detection
- Double/Click Recognition
- Power Management
- Vibration Monitoring
- Inclination and Tilt Sensing
- Pedometer

Key Specifications

- LGA-10 Package 3x3x0.9 mm
- User Selectable Range $\pm 2g$, $\pm 4g$, $\pm 8g$, $\pm 16g$
- Data Output Rate from 1Hz to 1K Hz
- Supply Voltage 1.62V to 3.6V
- Digital Resolution 14-bit
- Operation Temperature Range -40°C to $+85^{\circ}\text{C}$

Description

The GSDA313 is a capacitive three-axis linear accelerometer specifically designed to meet the requirements for low-power consumer electronics. Packaged in 3x3x0.9mm land grid array (LGA-10), the device has an outstanding operating temperature range of -40°C to $+85^{\circ}\text{C}$. Utilizing state of the art techniques and process, GSDA313 sensor element is fabricated by single crystal silicon with DRIE process and is protected by hermetically sealed silicon cap. The device features user selectable full-scale measurement range of $\pm 2g$ / $\pm 4g$ / $\pm 8g$ / $\pm 16g$, high resolution of 14-bit and a wide of data output rate while embedding signal condition, temperature compensation, self-test, motion detection. The power-down mode, flexible interrupt, digital interface of I²C offer design engineers most flexibility to configure desired patterns and functionalities for battery-powered devices.

Mechanical Characteristics

(V_{DD}=2.5V, T=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Min	Type	Max	Unit
FS	Measurement Range	FS bit set to 00		±2		g
		FS bit set to 01		±4		g
		FS bit set to 10		±8		g
		FS bit set to 11		±16		g
So	Sensitivity	FS bit set to 00		4096		LSB/g
		FS bit set to 01		2048		LSB/g
		FS bit set to 10		1024		LSB/g
		FS bit set to 11		512		LSB/g
TCS _o	Sensitivity Change vs. Temperature	FS bit set to 00		0.01		%/°C
T _{yoff}	Typical Zero-g Level Offset Accuracy			70		mg
T _{coff}	Zero-g Level Change vs. Temperature	Max delta from 25°C		±0.44		mg/°C
An	Acceleration Noise Density	FS bit set to 00, Normal Mode, ODR = 1000Hz		150	200	ug/sqrt(Hz)
V _{st}	Self-Test Output Change	X: FS bit set to 00		400		mg
		Y: FS bit set to 00		400		mg
		Z: FS bit set to 00		400		mg
Top	Operation Temperature Range		-40		85	°C

Note:

1. The product is factory calibrated at 2.5 V. The operational power supply range is from 1.62V to 3.6 V.

Electrical Characteristics

($V_{DD}=2.5V$, $T=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ.	Max	Unit
V_{DD}	Supply Voltage		1.62	2.5	3.6	V
V_{DD_IO}	I/O Pins Supply Voltage		1.62		3.6	V
I_{DD}	Current Consumption in Normal Mode	Top=25°C, ODR=1kHz		180		μA
I_{DD_LP}	Current Consumption in Low Power Mode	Top=25°C, ODR=62.5Hz, BW=500Hz		40		μA
I_{DD_SM}	Current Consumption in Suspend Mode	Top=25°C		0.7		μA
V_{IH}	Digital High Level Input Voltage	I ² C	0.7 * V_{DD_IO}			V
V_{IL}	Digital Low Level Input Voltage	I ² C			0.3 * V_{DD_IO}	V
V_{OH}	High Level Output Voltage		0.9 * V_{DD_IO}			V
V_{OL}	Low Level Output Voltage				0.1 * V_{DD_IO}	V
BW	System Bandwidth		1.95		500	Hz
ODR	Output Data Rate		1		1000	Hz
Wake-up time	twu	From Stand-by		1		ms
Start-up time	tsu	From Power-off		3		ms
PSRR	Power Supply Rejection Rate	Top=25°C			20	mg/V

Absolute Maximum Ratings

Parameter	Test conditions	Min	Max	Unit
Storage Temperature		-45	125	°C
Supply Voltage	Supply Pins	-0.3	4.25	V
Supply Voltage	Logic Pins	-0.3	Vdd_IO+0.3	V
ESD Rating	HMB, R=1.5k,C=100pF		±2	kV
Mechanical Shock	Duration<200us		10,000	g

Notes:


1. Stresses above those listed as “absolute maximum ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device under these conditions is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.
2. Supply voltage on any pin should never exceed 4.25V.
3. This is a mechanical shock sensitive device, improper handling can cause permanent damages to the part.



4. This is an ESD sensitive device, improper handling can cause permanent damages to the part.




Pin Configuration

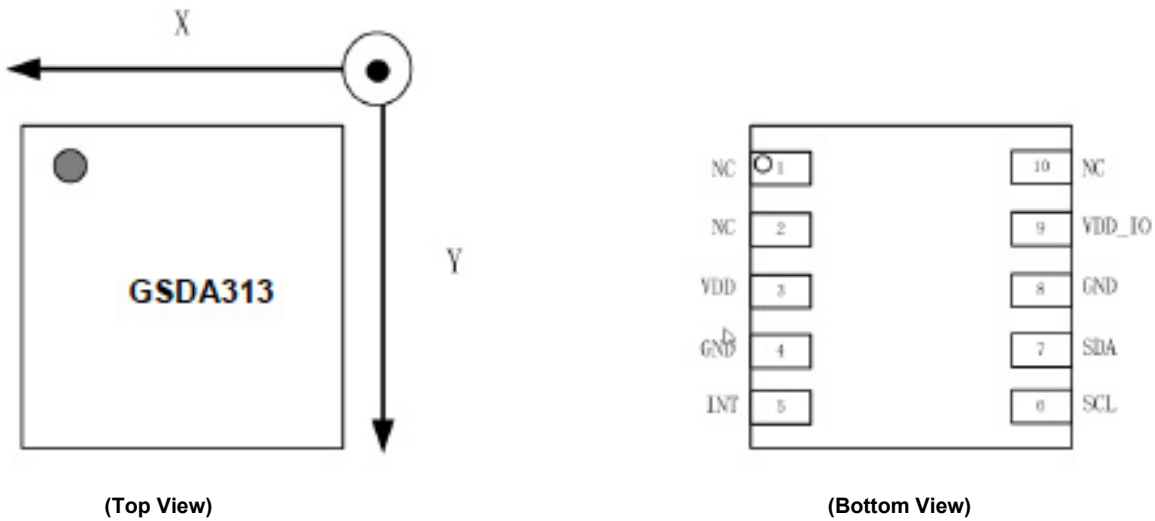


Pin Description

Pin#	Name	Function
1	NC	Not Connected
2	NC	Not Connected
3	VDD	Power Supply
4	GND	0V Supply
5	INT	Interrupt Pin
6	SCL	I ² C Serial Clock (SCL)
7	SDA	I ² C Serial Data (SDA)
8	GND	0V Supply
9	VDD_IO	Power Supply for I/O Pins
10	NC	Not Connected


Mechanical Data and Package Dimensions: 10 Pin LGA

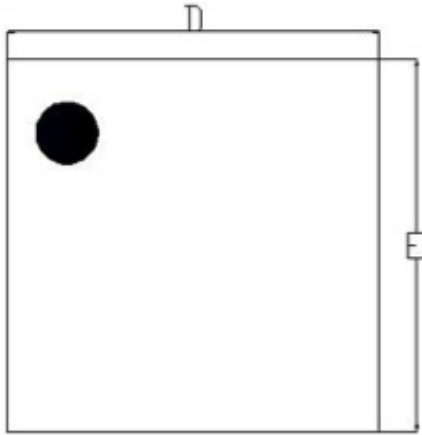

(TOP VIEW)

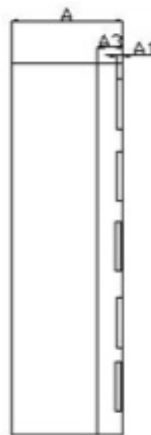

(SIDE VIEW)

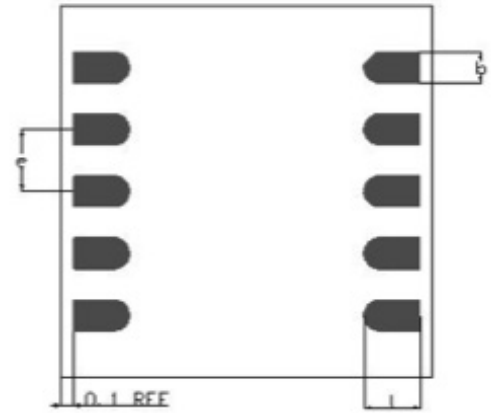

(BOTTOM VIEW)

COMMON DIMENSIONS (MM)			
PACKAGE	LGA-10 PIN		
REF.	MIN.	NOM.	MAX.
A	0.80	0.90	1.00
A1	0.00	-	0.05
A3	0.20 REF.		
D	2.90	3.00	3.10
E	2.90	3.00	3.10
L	0.40	0.45	0.50
b	0.20	0.25	0.30
e	0.5 BSC		