


Tape & Reel Information

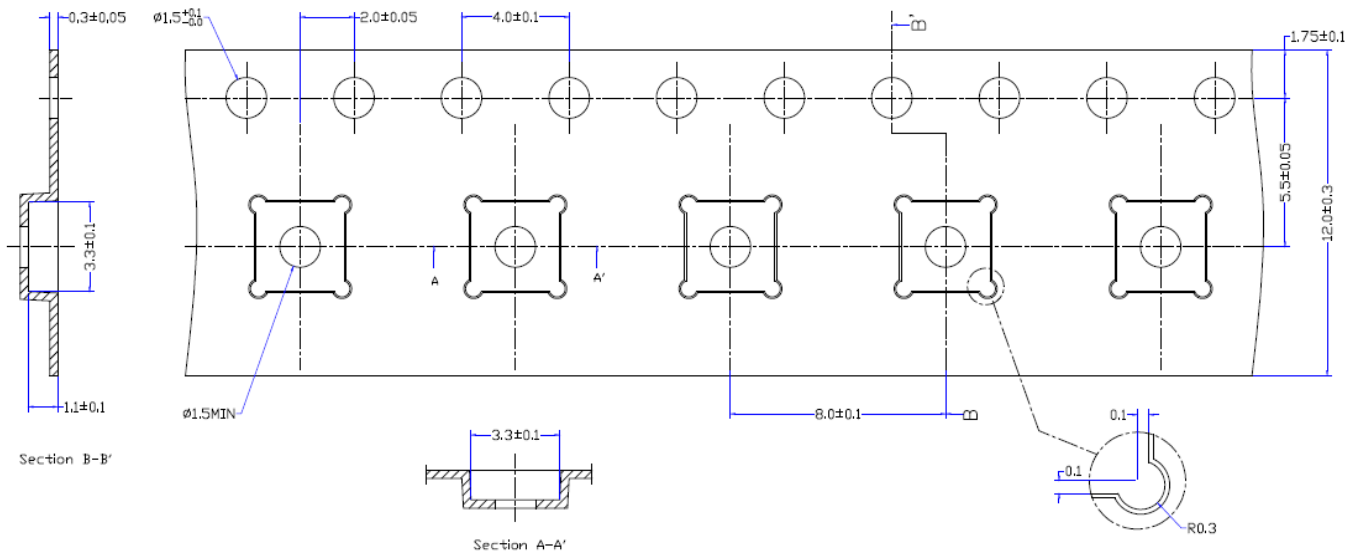

NOTES:

- 1.10 procket hole pitch cumulative tolerance ± 0.2
- 2.The meander of the tape is assumed with 1mm or less every 100mm between 250mm
- 3.MATERIAL:CONDUCTIVE POYSTYRENE
- 4.ALL DIMS IN MM
- 5.There must not be foreign body adhesion and the state of the surface must be excellent
- 6.17" PAPER-Reel, 77500pockets(620m)
- 7.Surface resistance $1 \times 10^5 \sim 1 \times 10^9$ OHMS/SQ

Recommend Footprint Information

