



Main Product Characteristics

$V_{(BR)DSS}$	30V
$R_{DS(ON)}$	4.5mΩ
I_D	82A



PPAK5X6



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The SSFP3964 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supply and a wide variety of other applications.

Absolute Maximum Ratings ($T_C=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous ($T_C=25^\circ C$)	I_D	82	A
Drain Current-Continuous ($T_C=100^\circ C$)		52	
Drain Current-Pulsed ¹	I_{DM}	328	A
Single Pulse Avalanche Energy ²	E_{AS}	115	mJ
Single Pulse Avalanche Current ²	I_{AS}	48	A
Power Dissipation ($T_C=25^\circ C$)	P_D	73.5	W
Power Dissipation-Derate above 25°C		0.59	W/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.7	°C/W
Operating Junction Temperature Range	T_J	-50 To +150	°C
Storage Temperature Range	T_{STG}	-50 To +150	°C

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On/Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=250\mu\text{A}$	30	-	-	V
BV_{DSS} Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Reference to 25°C , $\text{I}_D=1\text{mA}$	-	0.03	-	$\text{V}/^\circ\text{C}$
Drain-Source Leakage Current	$\text{I}_{\text{DS}(\text{SS})}$	$\text{V}_{\text{DS}}=30\text{V}, \text{V}_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$	-	-	1	μA
		$\text{V}_{\text{DS}}=24\text{V}, \text{V}_{\text{GS}}=0\text{V}, T_J=125^\circ\text{C}$	-	-	10	μA
Gate-Source Leakage Current	I_{GSS}	$\text{V}_{\text{GS}}=\pm 20\text{V}, \text{V}_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Static Drain-Source On-Resistance	$\text{R}_{\text{DS}(\text{ON})}$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=15\text{A}$	-	3.6	4.5	$\text{m}\Omega$
		$\text{V}_{\text{GS}}=4.5\text{V}, \text{I}_D=10\text{A}$	-	4.9	6.4	
Gate Threshold Voltage	$\text{V}_{\text{GS}(\text{th})}$	$\text{V}_{\text{GS}}=\text{V}_{\text{DS}}, \text{I}_D=250\mu\text{A}$	1.0	1.6	2.5	V
$\text{V}_{\text{GS}(\text{th})}$ Temperature Coefficient	$\Delta \text{V}_{\text{GS}(\text{th})}$		-	-4.17	-	$\text{mV}/^\circ\text{C}$
Forward Transconductance	g_{fs}	$\text{V}_{\text{DS}}=10\text{V}, \text{I}_D=3\text{A}$	-	10	-	S
Dynamic and Switching Characteristics						
Total Gate Charge ^{3,4}	Q_g	$\text{V}_{\text{DS}}=15\text{V}, \text{I}_D=15\text{A}, \text{V}_{\text{GS}}=10\text{V}$	-	34.6	70	nC
Gate-Source Charge ^{3,4}	Q_{gs}		-	5.5	11	
Gate-Drain Charge ^{3,4}	Q_{gd}		-	6.8	13	
Turn-On Delay Time ^{3,4}	$t_{\text{d}(\text{on})}$	$\text{V}_{\text{DD}}=15\text{V}, \text{R}_G=3.3\Omega, \text{V}_{\text{GS}}=10\text{V}, \text{I}_D=1\text{A}$	-	9.7	20	nS
Rise Time ^{3,4}	t_r		-	15.8	31	
Turn-Off Delay Time ^{3,4}	$t_{\text{d}(\text{off})}$		-	37.4	75	
Fall Time ^{3,4}	t_f		-	12	24	
Input Capacitance	C_{iss}		-	1910	3800	pF
Output Capacitance	C_{oss}	$\text{V}_{\text{DS}}=15\text{V}, \text{V}_{\text{GS}}=0\text{V}, \text{F}=1\text{MHz}$	-	300	600	
Reverse Transfer Capacitance	C_{rss}		-	230	460	
Gate Resistance	R_g	$\text{V}_{\text{GS}}=0\text{V}, \text{V}_{\text{DS}}=0\text{V}, \text{F}=1\text{MHz}$	-	1.14	-	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current	I_s	$\text{V}_G=\text{V}_D=0\text{V}, \text{Force Current}$	-	-	82	A
Pulsed Source Current	I_{SM}		-	-	164	A
Diode Forward Voltage	V_{SD}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_s=1\text{A}, T_J=25^\circ\text{C}$	-	-	1	V

Note:

1. Repetitive Rating: Pulsed width limited by maximum junction temperature.
2. $\text{V}_{\text{DD}}=25\text{V}, \text{V}_{\text{GS}}=10\text{V}, \text{L}=0.1\text{mH}, \text{I}_{\text{AS}}=48\text{A}, \text{R}_G=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. Pulsed tested: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

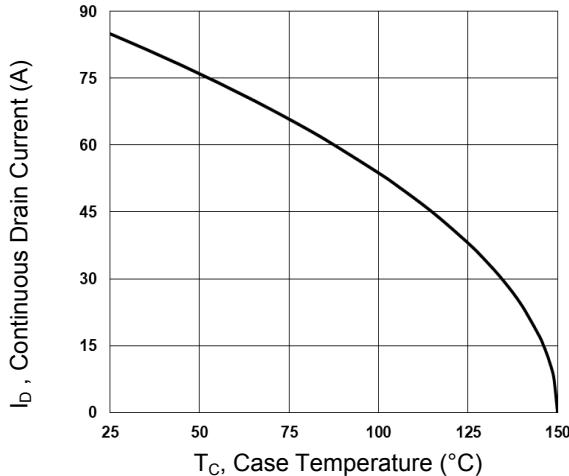


Figure 1. Continuous Drain Current vs. T_c

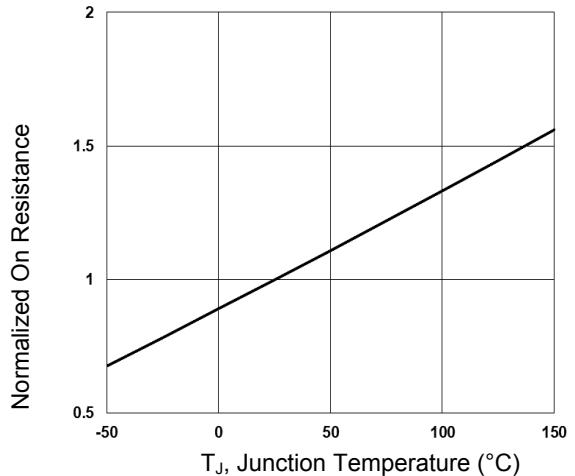


Figure 2. Normalized R_{DS(ON)} vs. T_j

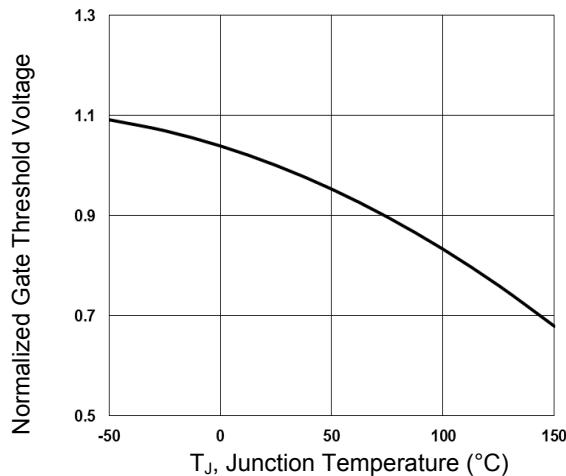


Figure 3. Normalized V_{th} vs. T_j

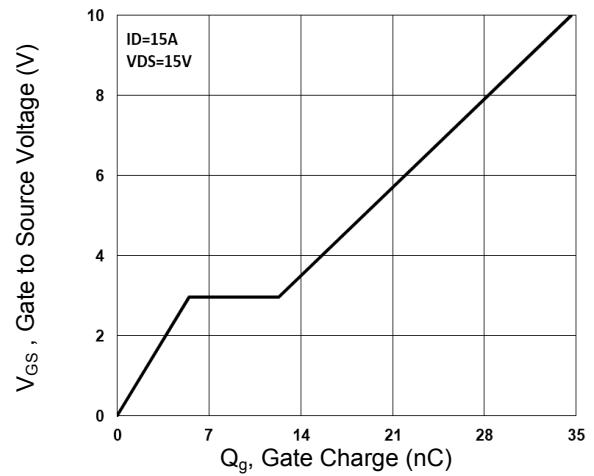


Figure 4. Gate Charge Characteristics

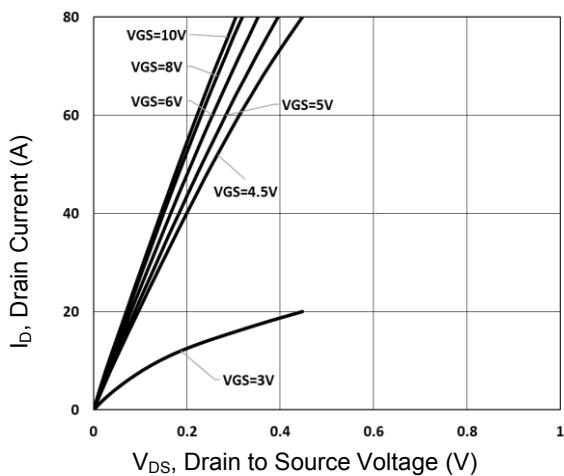


Figure 5. Typical Output Characteristics

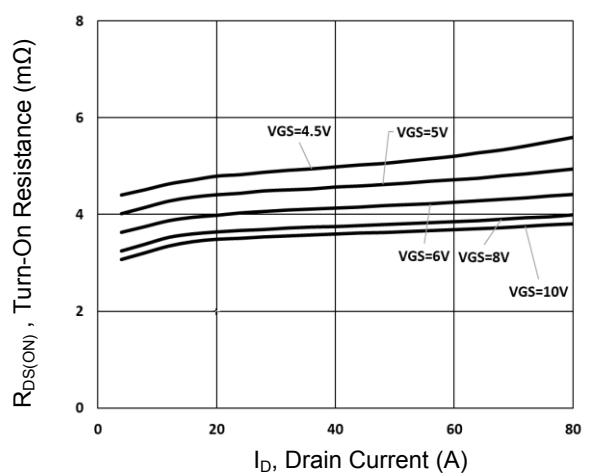


Figure 6. Turn-On Resistance vs. I_D

Typical Electrical and Thermal Characteristic Curves

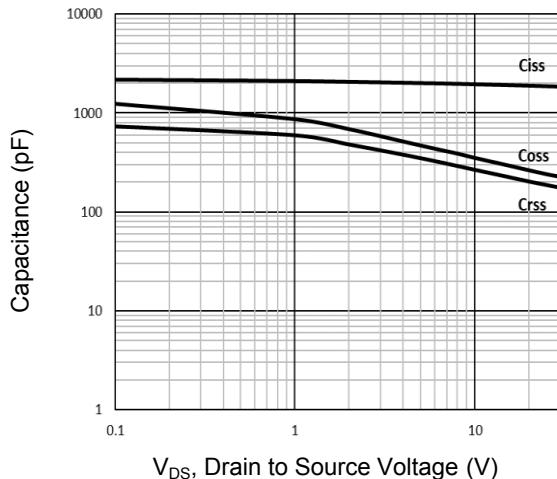


Figure 7. Capacitance Characteristics

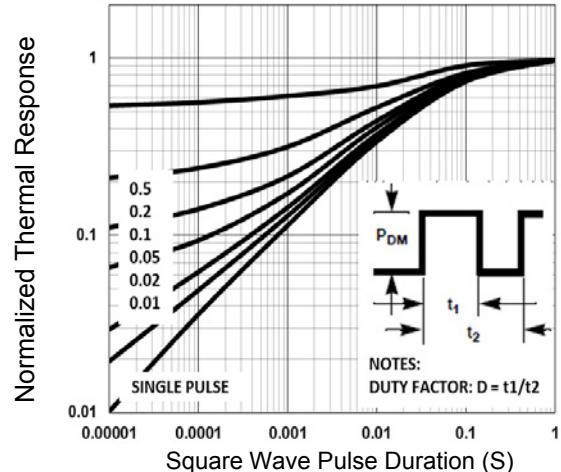


Figure 8. Normalized Transient Impedance

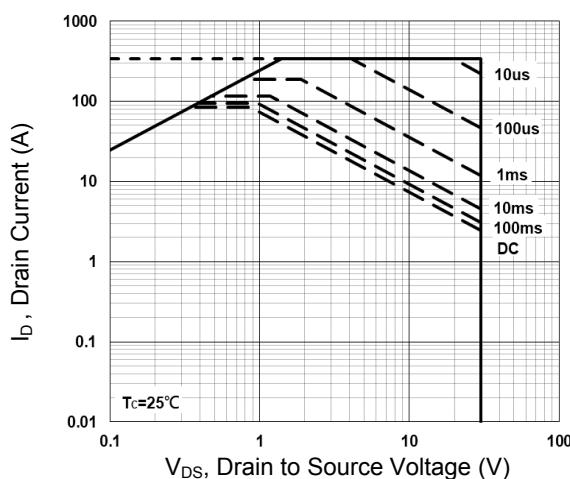


Figure 9. Maximum Safe Operation Area

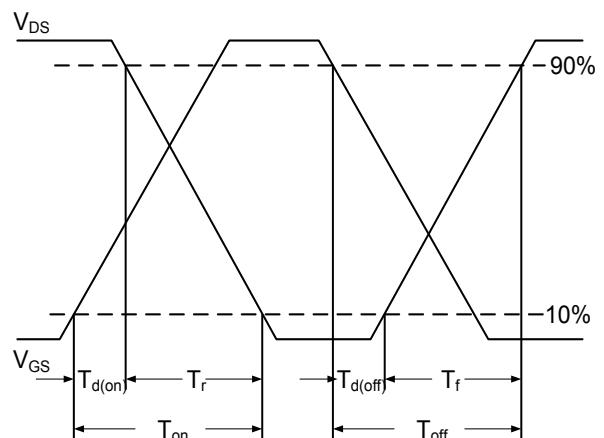


Figure 10. Switching Time Waveform


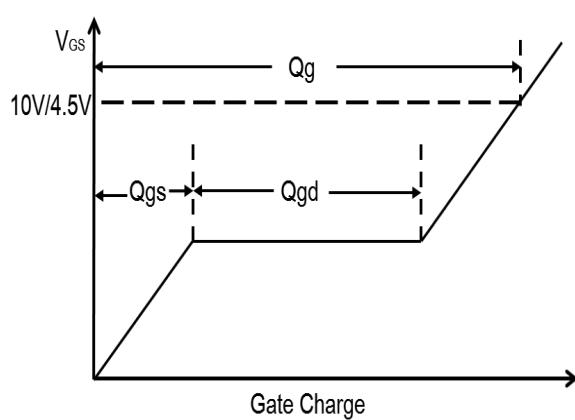


Figure 11. Gate Charge Waveform

Package Outline Dimensions

PPAK5X6

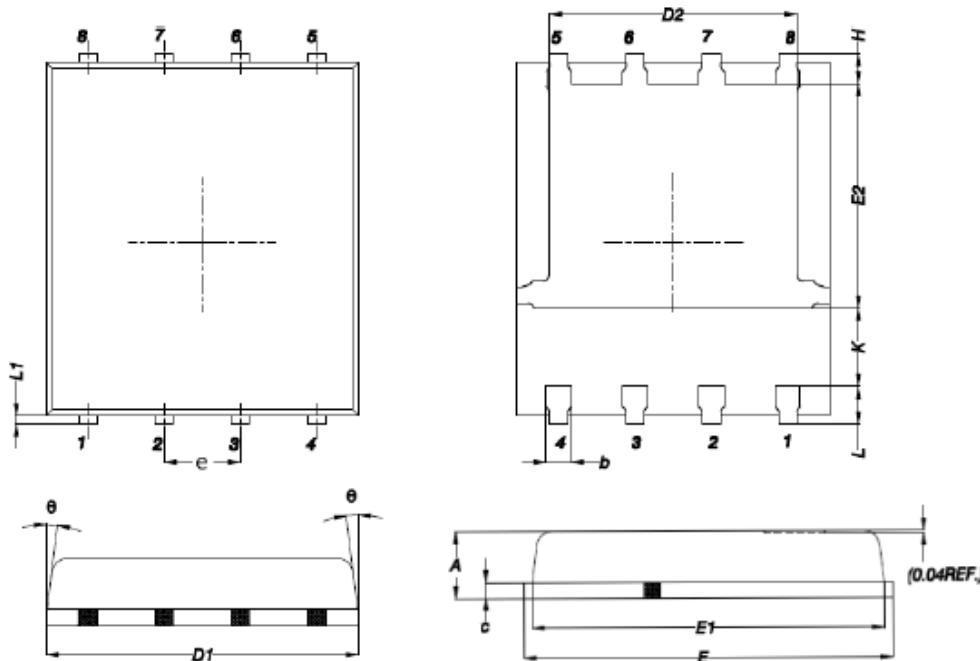

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.200	0.850	0.047	0.031
b	0.510	0.300	0.020	0.012
C	0.300	0.200	0.012	0.008
D1	5.400	4.800	0.212	0.189
D2	4.310	3.610	0.170	0.142
E	6.300	5.850	0.248	0.230
E1	5.960	5.450	0.235	0.215
E2	3.920	3.300	0.154	0.130
e	1.27BSC		0.05BSC	
H	0.650	0.380	0.026	0.015
K	-	1.100	-	0.043
L	0.710	0.380	0.028	0.015
L1	0.250	0.050	0.009	0.002
θ	12°	0°	12°	0°