

# GSL12A thru GSL110A

Surface Mount Schottky Rectifiers  
 Reverse Voltage 20V-100V Forward Current 1A

## Features

- Low forward voltage drop
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- Ideal for automated placement
- Meets environmental standard MIL-S-19500D
- Solder dip 275 °C, 10s



Package: DO-214AC (SMA)

## Applications

For use in general purpose rectification of lighting, power supply, inverter, converter and freewheeling diodes for consumer, automotive and telecommunication.



## Maximum Ratings (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	GSL12A	GSL13A	GSL14A	GSL15A	GSL16A	GSL17A	GSL18A	GSL19A	GSL110A	Unit
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	70	80	90	100	V
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	49	56	63	70	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	70	80	90	100	V
Maximum Average Forward Rectified current at T <sub>L</sub> (See Fig.1)	I <sub>F(AV)</sub>	1									A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I <sub>FSM</sub>	45									A
Operating Junction Temperature Range	T <sub>J</sub>	- 55 to + 125			- 55 to + 150						°C
Storage Temperature Range	T <sub>STG</sub>	- 55 to + 150									°C

## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Test Conditions	Symbol	GSL12A	GSL13A	GSL14A	GSL15A	GSL16A	GSL17A	GSL18A	GSL19A	GSL110A	Unit	
Maximum Instantaneous Forward Voltage	I <sub>F</sub> =1 A	V <sub>F</sub>	0.42			0.50		0.68				V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	T <sub>A</sub> =25°C	I <sub>R</sub>	0.2									mA	
	T <sub>A</sub> =100°C		10										
Typical Junction Capacitance	4.0 V, 1 MHz	C <sub>J</sub>	85										pF
Maximum Thermal Resistance		R <sub>θJA</sub> <sup>1</sup>	80										°C/W
		R <sub>θJT</sub> <sup>2</sup>	16										°C/W

Notes: (1) Thermal resistance from junction to ambient, 0.197 × 0.197 inch ( 5.0 × 5.0mm ) copper pads to each terminal

(2) Thermal resistance from junction to terminal, 0.197 × 0.197 inch ( 5.0 × 5.0mm ) copper pads to each terminal

# GSL12A thru GSL110A

Surface Mount Schottky Rectifiers  
 Reverse Voltage 20V-100V Forward Current 1A

## Ratings and Characteristics Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

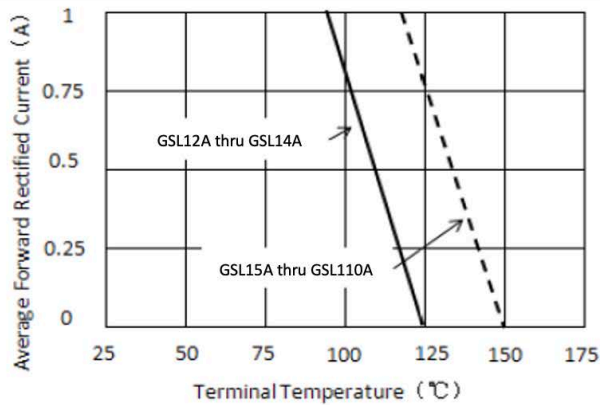


Figure 1. Forward Current Derating Curve

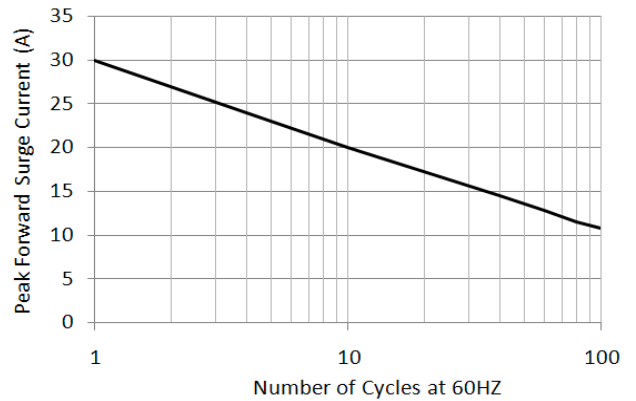


Figure 2. Maximum Non-repetitive Peak Forward Surge Current

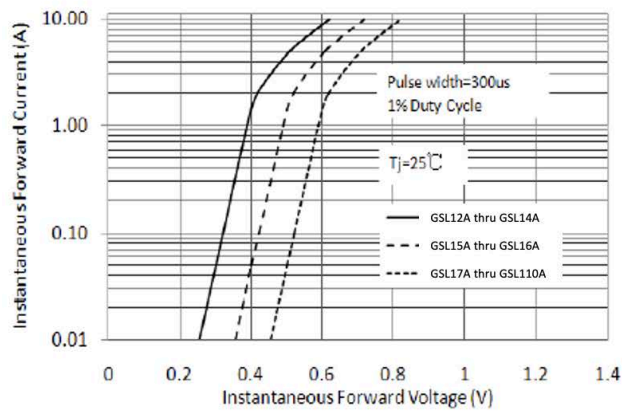


Figure 3. Typical Instantaneous Forward Characteristics

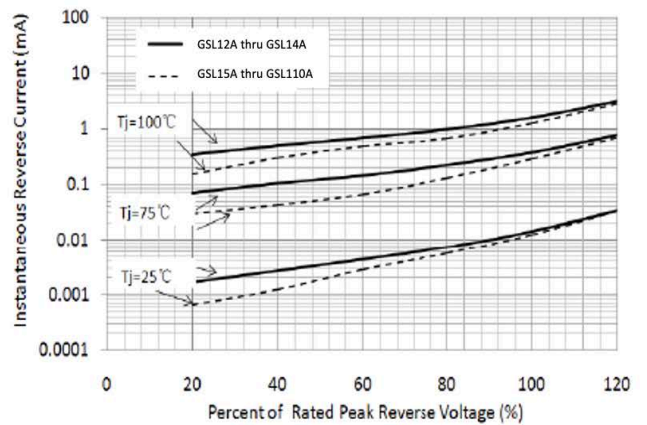


Figure 4. Typical Reverse Characteristics


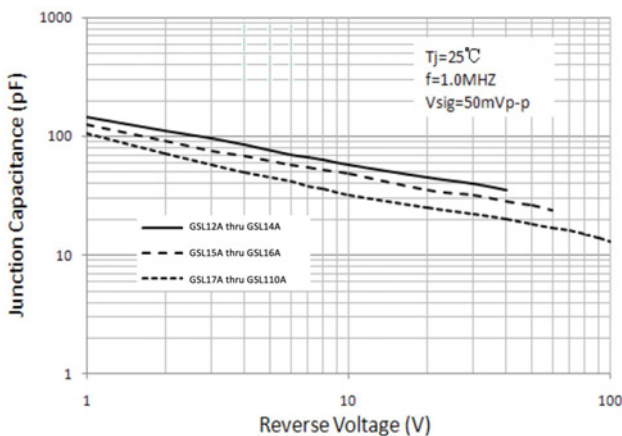


Figure 5. Typical Junction Capacitance

# GSL12A thru GSL110A


Surface Mount Schottky Rectifiers  
 Reverse Voltage 20V-100V Forward Current 1A

## Package Outline Dimensions SMA (DO-214AC)

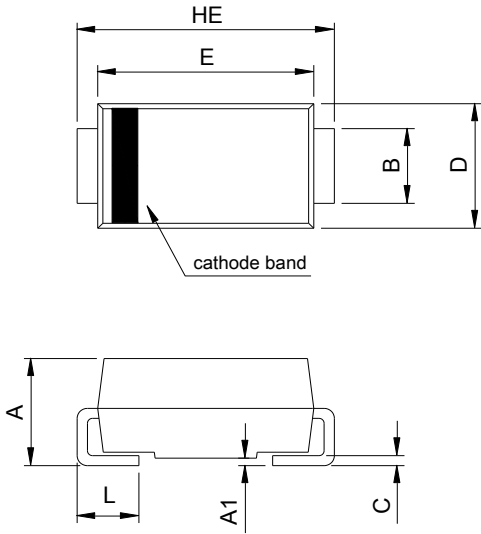

DIM	SMA (DO-214AC)			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.90	2.30	0.075	0.091
A1	0.00	0.20	0.000	0.008
B	1.25	1.65	0.049	0.065
C	0.15	0.31	0.006	0.012
D	2.35	2.90	0.093	0.114
E	3.99	4.60	0.157	0.181
HE	4.80	5.30	0.189	0.209
L	0.76	1.52	0.030	0.060

## Recommended Pad Layout

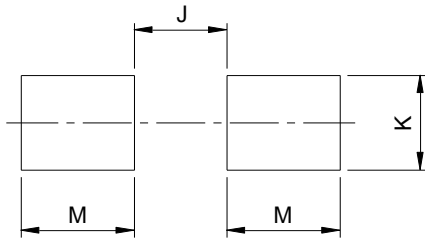

DIM	Recommended Pad Layout (Reference ONLY)			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	-	2.20	-	0.087
K	1.72	-	0.068	-
M	2.00	-	0.079	-