



## Features

- Low power loss
- High efficiency, low forward voltage
- High current capability, high surge capacity
- High voltage



Schematic Diagram

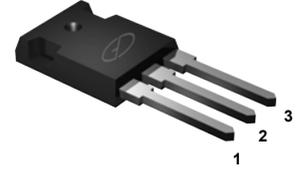

TO-247

## Applications

- Switching power supply
- Power switching circuits
- Inverter power supply

## Absolute Maximum Ratings (T<sub>C</sub>=25°C unless otherwise specified)

| Parameter   | Symbol             | Value       | Unit |
|---|--------------------|-------------|------|
| Peak Repetitive Reverse Voltage                                   | V <sub>R</sub> RM  | 200         | V    |
| Working Peak Reverse Voltage                                      | V <sub>R</sub> WM  | 200         | V    |
| DC Blocking Voltage   | V <sub>R</sub>     | 200         | V    |
| Average Rectified Forward Current (Single), T <sub>C</sub> =100°C | I <sub>F(AV)</sub> | 15          | A    |
| Average Rectified Forward Current (Double), T <sub>C</sub> =100°C |                    | 30          | A    |
| Repetitive Peak Surge Current (Single)                            | I <sub>F</sub> RM  | 20          | A    |
| Non-Repetitive Peak Surge Current (Single), t=8.3ms               | I <sub>F</sub> SM  | 180         | A    |
| Avalanche Energy (Single), L=1mH                                  | E <sub>AS</sub>    | 50          | mJ   |
| Thermal Resistance, Junction to Case                              | R <sub>θ</sub> JC  | 0.75        | °C/W |
| Operating Junction Temperature Range                              | T <sub>J</sub>     | -55 to +150 | °C   |
| Storage Temperature Range   | T <sub>STG</sub>   | -55 to +150 | °C   |

## Electrical Characteristics (T<sub>C</sub>=25°C unless otherwise specified)

| Parameter                             | Symbol           | Test Conditions   | Min | Typ  | Max | Unit |
|---------------------------------------|------------------|---|-----|------|-----|------|
| Maximum Instantaneous Forward Voltage | V <sub>F</sub>   | I <sub>F</sub> =10A                                       | -   | 0.89 | -   | V    |
|                                       |                  | I <sub>F</sub> =15A                                       | -   | 0.93 | 1   | V    |
|                                       |                  | I <sub>F</sub> =15A, T <sub>C</sub> =150°C                | -   | -    | 0.9 | V    |
|                                       |                  | I <sub>F</sub> =20A                                       | -   | 0.95 | 1.1 | V    |
| Maximum Instantaneous Reverse Current | I <sub>R</sub>   | V <sub>R</sub> =200V                                      | -   | -    | 5   | uA   |
|                                       |                  | V <sub>R</sub> =200V, T <sub>C</sub> =150°C               | -   | -    | 1   | mA   |
| Maximum Reverse Recovery Time         | t <sub>rr</sub>  | V <sub>R</sub> =30V, I <sub>F</sub> =1A,<br>-di/dt=50A/us | -   | 21   | 35  | ns   |
| Total Capacitance                     | C <sub>tot</sub> | V <sub>R</sub> =0V, f=1MHz                                | -   | 300  | -   | pF   |
| DC Blocking Voltage                   | V <sub>BR</sub>  | I <sub>R</sub> =100uA                                     | 210 | 250  | -   | V    |

## Typical Electrical and Thermal Characteristic Curves

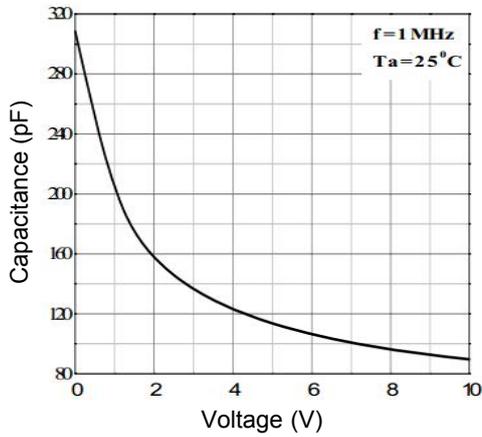


Figure 1. Total Capacitance vs. Voltage

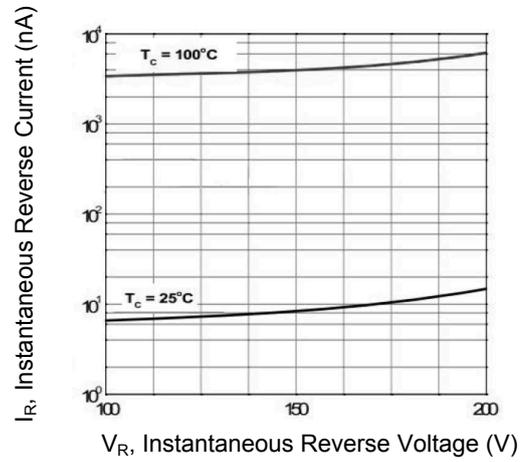


Figure 2. Reverse Current vs. Reverse Voltage

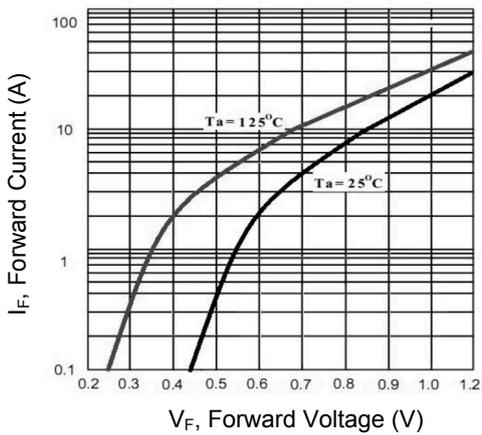


Figure 3. Forward Current vs. Forward Voltage


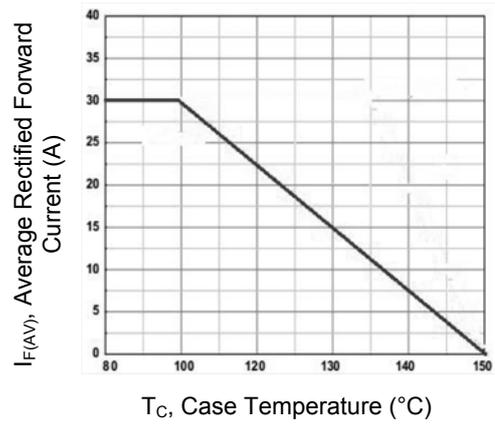


Figure 4. Current Derating Curve

## Package Outline Dimensions (TO-247)

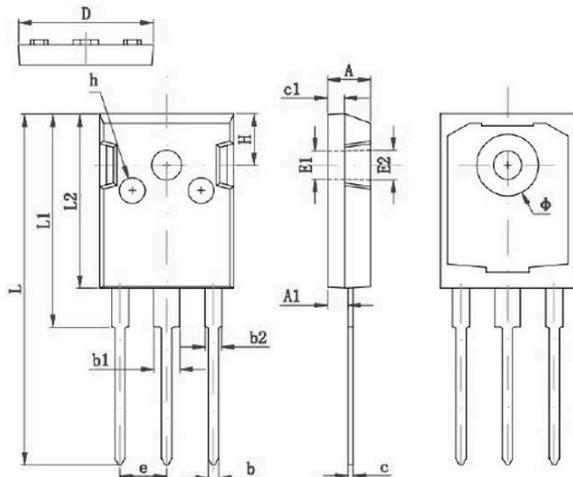

| Symbol | Dimensions in Millimeters |        | Dimensions in Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min                       | Max    | Min                  | Max   |
| A      | 4.850                     | 5.150  | 0.191                | 0.200 |
| A1     | 2.200                     | 2.600  | 0.087                | 0.102 |
| b      | 1.000                     | 1.400  | 0.039                | 0.055 |
| b1     | 2.800                     | 3.200  | 0.110                | 0.126 |
| b2     | 1.800                     | 2.200  | 0.071                | 0.087 |
| c      | 0.500                     | 0.700  | 0.020                | 0.028 |
| c1     | 1.900                     | 2.100  | 0.075                | 0.083 |
| D      | 15.450                    | 15.750 | 0.608                | 0.620 |
| E1     | 3.500 REF                 |        | 0.138 REF            |       |
| E2     | 3.600 REF                 |        | 0.142 REF            |       |
| L      | 40.900                    | 41.300 | 1.610                | 1.626 |
| L1     | 24.800                    | 25.100 | 0.976                | 0.988 |
| L2     | 20.300                    | 20.600 | 0.799                | 0.811 |
| Φ      | 7.100                     | 7.300  | 0.280                | 0.287 |
| e      | 5.450 TYP                 |        | 0.215 TYP            |       |
| H      | 5.980 REF                 |        | 0.235 REF            |       |
| h      | 0.000                     | 0.300  | 0.000                | 0.012 |

## Order Information

| Device       | Package | Marking | Carrier | Quantity        |
|--------------|---------|---------|---------|-----------------|
| GSMUR3020BCT | TO-247  | MUR3020 | Tube    | 30 Units / Tube |