



Features

- FRED (Planar) wafer construction
- Superfast recovery time
- Low forward voltage drop, low power losses
- High efficiency operation
- Plastic package has underwriters Laboratory Flammability Classification 94V-0



TO-252 (D-PAK)



Schematic Diagram

Mechanical Data

- Case: Epoxy, Molded
- Weight: 0.4 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 sec
- Shipped 2500 units per reel

Maximum Ratings & Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Test Conditions	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	-	V_{RRM}	200	V
Working Peak Reverse Voltage	-	V_{RWM}	200	V
Maximum DC Blocking Voltage	-	V_{DC}	200	V
Maximum Average Forward Rectified Current at $T_c=105^\circ\text{C}$	-	$I_F(AV)$	5	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	-	I_{FSM}	90	A
Voltage Rate of Change (rated V_R)	-	Dv/dt	10000	V/us
Operating Junction Temperature Range	-	T_J	-55 to +150	°C
Storage Temperature Range	-	T_{STG}	-55 to +150	°C
Maximum Reverse Recover Time ($I_F=0.5\text{Amp}$, $I_R=1.0\text{Amp}$, $I_{REC}=0.25\text{Amp}$)	-	T_{rr}	35	ns
Maximum Instantaneous Forward Voltage per Leg	$I_F=5\text{A}$ $T_c=25^\circ\text{C}$ $I_F=5\text{A}$ $T_c=125^\circ\text{C}$	V_F	0.96 0.88	V
Maximum Reverse Current per Leg at Working Peak Reverse Voltage	$T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$	I_R	10 500	uA uA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction to Case per Leg	$R_{\theta JC}$	3.5	°C /W
Thermal Resistance, Junction to Ambient per Leg	$R_{\theta JA}$	62.5	°C /W

Note: Pulse test: 300us pulse width, duty cycle=2%

Typical Characteristics Curves

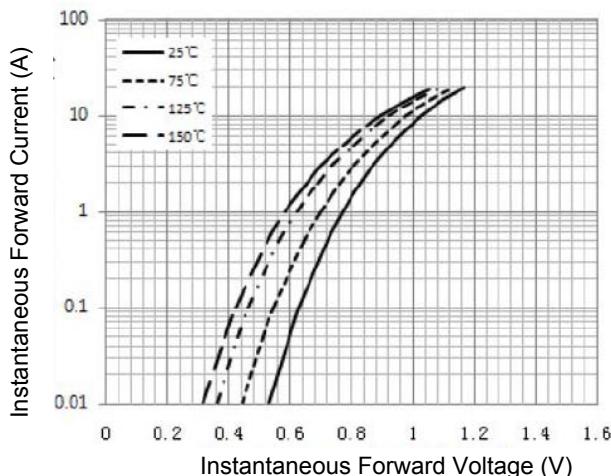


Figure 1. Typical Instantaneous Forward Characteristics

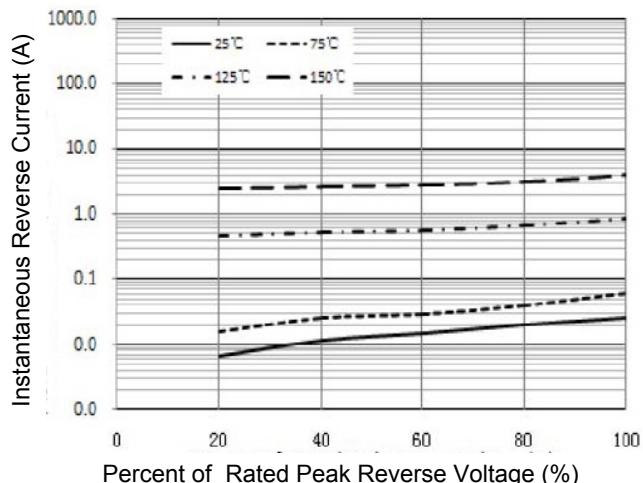


Figure 2. Typical Reverse Characteristics

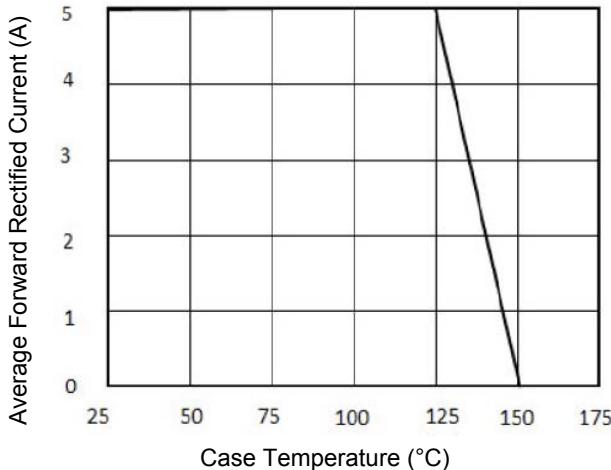


Figure 3. Forward Current Derating Curve

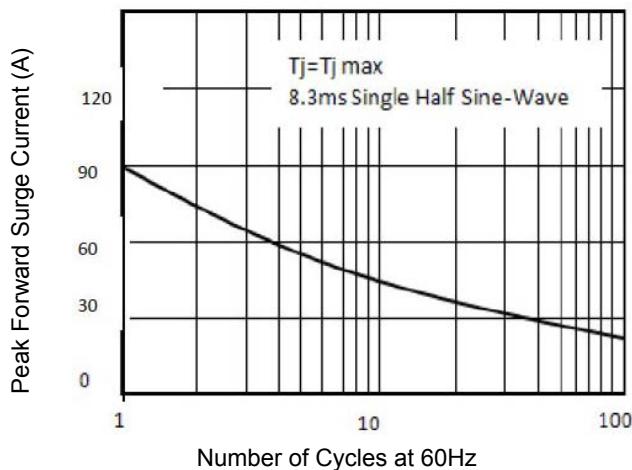


Figure 4. Maximum Non-Repetitive Peak Forward Surge Current

Package Outline Dimensions TO-252 (D-PAK)

Unit: mm

