


Features


- High collector current
- Complementary to BC807
- SOT-23 plastic package
- RoHS compliant

Applications

- Switching application
- General power amplifier



SOT-23




Schematic Diagram

Absolute Maximum Ratings (T_A=25°C unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V _{CBO}	50	V
Collector to Emitter Voltage	V _{CEO}	45	V
Emitter to Base Voltage	V _{EBO}	5.0	V
Collector Current-Continuous	I _C	500	mA
Collector Current-Peak Collector Current	I _{CM}	1.0	A
Collector Power Dissipation	P _C	300	mW
Thermal Resistance From Junction to Ambient	R _{θJA}	417	°C/W
Junction Temperature	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Classification Of h_{FE(1)}

h _{FE} Classification	GSBC817	GSBC817-16	GSBC817-25	GSBC817-40
h _{FE} Range	100 to 600	100 to 250	160 to 400	250 to 600
Marking	6D	6A	6B	6C



Electrical Characteristics (T_A=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V _{CBO}	I _C =10μA, I _E =0	50	-	-	V
Collector to Emitter Breakdown Voltage	V _{CEO}	I _C =10mA, I _B =0	45	-	-	V
Emitter to Base Breakdown Voltage	V _{EBO}	I _E =10μA, I _C =0	5.0	-	-	V
Collector Cut-Off Current	I _{CBO}	V _{CB} =20V, I _E =0	-	-	0.1	μA
Emitter Cut-Off Current	I _{EBO}	V _{EB} =5.0V, I _E =0	-	-	0.1	μA
DC Current Gain	h _{FE(1)}	V _{CE} =1.0V, I _C =100mA	100	-	600	-
	h _{FE(2)}	V _{CE} =1.0V, I _C =500mA	40	-	-	-
Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C =500mA, I _B =50mA	-	-	0.7	V
Base-Emitter Saturation Voltage	V _{BE(sat)}	I _C =500mA, I _B =50mA	-	-	1.2	V
Base to Emitter Voltage	V _{BE}	V _{CE} =1.0V, I _C =500mA	-	-	1.2	V
Transition Frequency	f _T	V _{CE} =5.0V, I _C =10mA F=100MHz	100	-	-	MHz
Collector Output Capacitance	C _{ob}	V _{CB} =10V, I _E =0, F=1.0MHz	-	5.0	-	pF

Typical Characteristic Curves

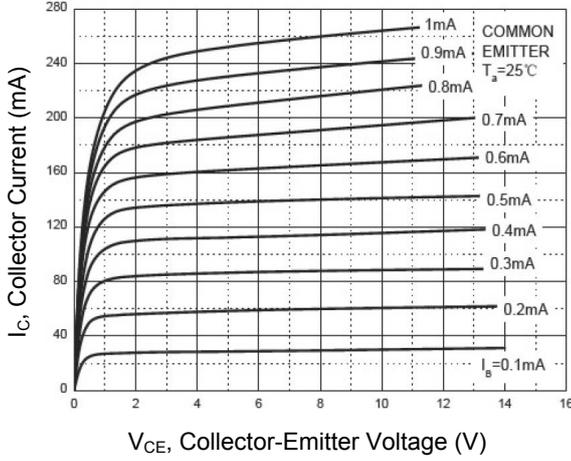


Figure 1. Static Characteristic

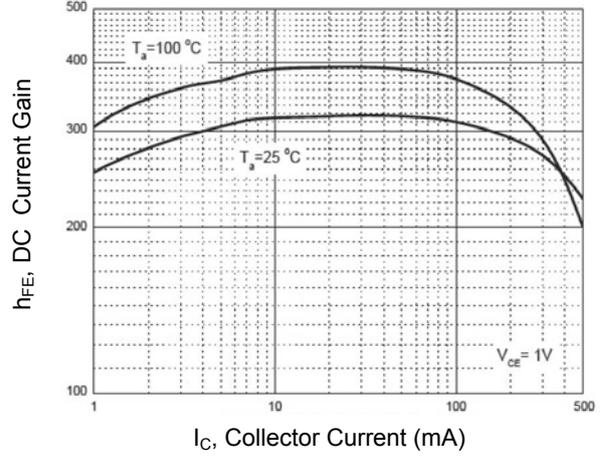


Figure 2. DC Current Gain vs. Collector Current

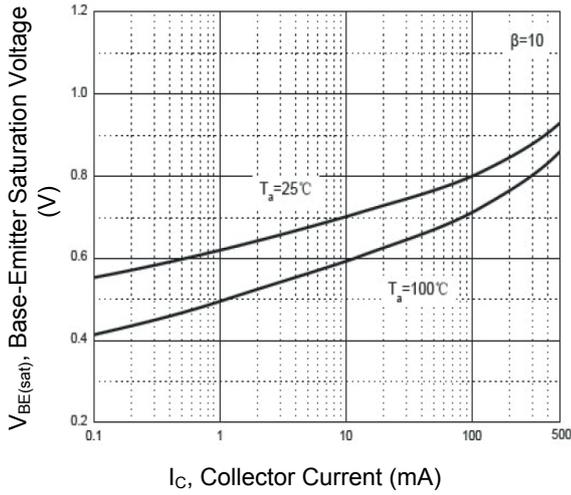


Figure 3. Base-Emmitter Saturation Voltage vs. Collector Current

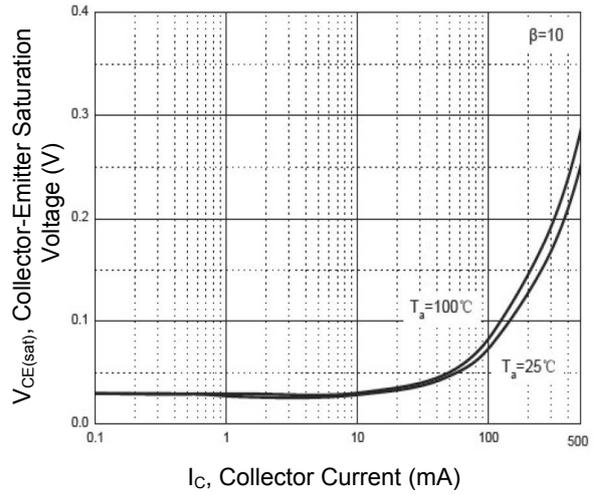


Figure 4. Collector-Emmitter Saturation Voltage vs. Collector Current

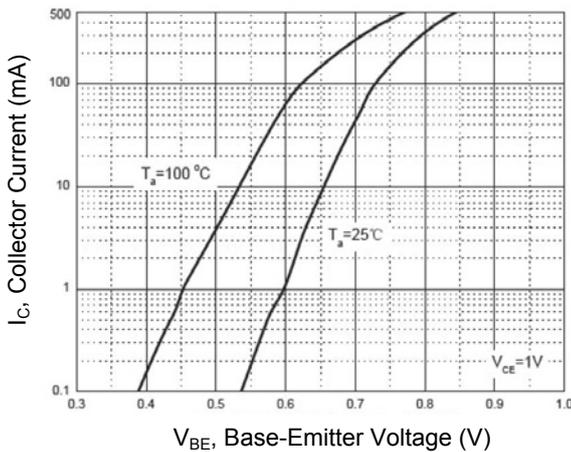


Figure 5. Collector Current vs. Base-Emmitter Voltage

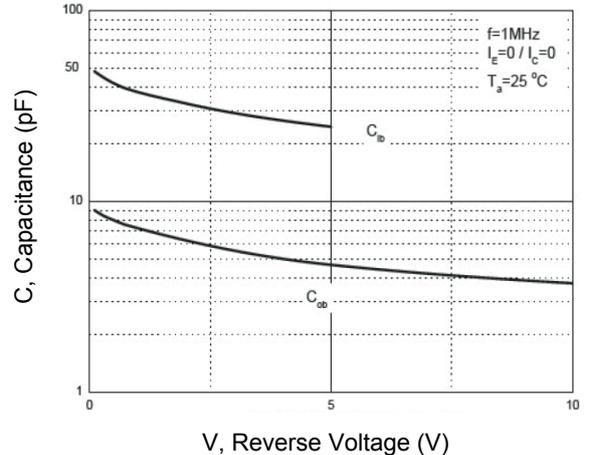


Figure 6. Capacitance Characteristics

Typical Characteristic Curves

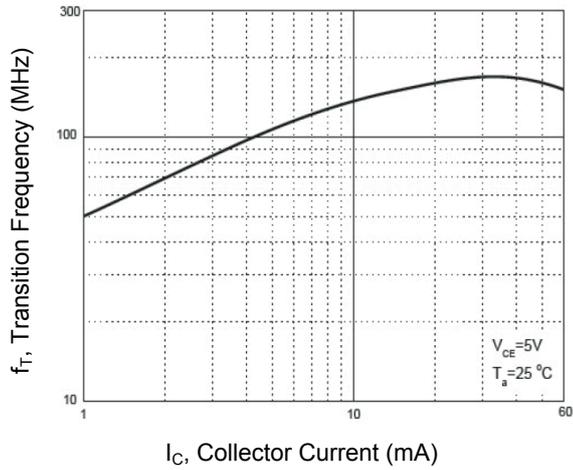


Figure 7. Transition Frequency vs. Collector Current


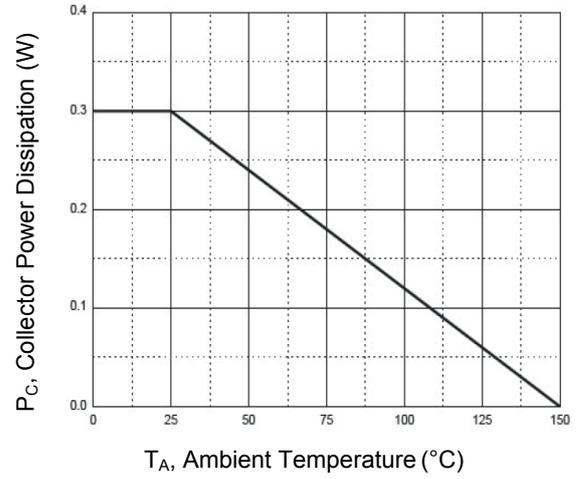



Figure 8. Power Dissipation vs. Ambient Temperature

Package Outline Dimensions (SOT-23)

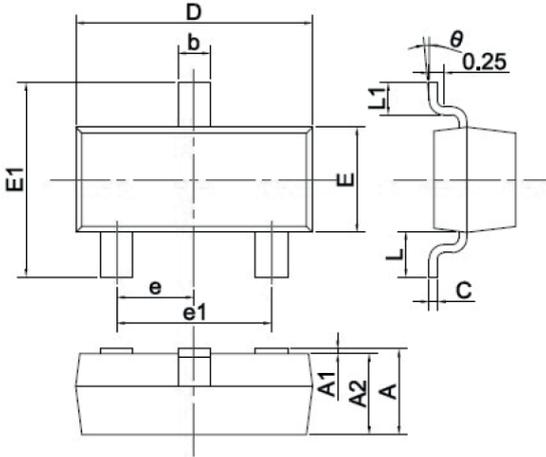

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
C	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Recommended Pad Layout



Note:

1. Controlling dimension: in millimeters
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

Order Information

Device	Package	Reel Size	Quantity	HSF Status
GSBC817 series	SOT-23	7 inches	3,000pcs / Reel	RoHS Compliant