


Features

- Low leakage current
- Schottky barrier rectifier
- Low forward voltage drop
- Moisture sensitivity: Level 1, per J-STD-020
- Halogen-free according to IEC 61249-2-21 definition
- High temperature soldering guaranteed: 260°C/10 seconds




TO-277



RoHS
COMPLIANT

Applications

For use of fast switching in RF module, lighting, cellular phone, portable device, power supplies, other consumer applications.



Schematic Diagram

Maximum Ratings (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	150	V
Maximum RMS Voltage	V _{RMS}	105	V
Maximum DC Blocking Voltage	V _{DC}	150	V
Maximum Average Forward Rectified Current	I _{F(AV)}	10	A
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	175	A
Thermal Resistance, Junction to Ambient ¹	R _{θJA}	40	°C/W
Thermal Resistance, Junction to Case ¹	R _{θJC}	15	°C/W
Thermal Resistance, Junction to Lead ¹	R _{θJL}	7	°C/W
Operating Junction Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Typ	Max	Unit	
Forward Drop Voltage	V _F	I _F =1A	T _A =25°C	0.60	V	
		I _F =2A		0.67		
		I _F =5A		0.75		
		I _F =10A		0.81		
		I _F =1A	T _A =125°C	0.47		0.52
		I _F =2A		0.54		0.60
		I _F =5A		0.61		0.65
		I _F =10A		0.68		0.75
Reverse Leakage Current @ V _R	I _R	T _J =25°C	-	0.1	mA	
		T _J =125°C	-	20		
Junction Capacitance	C _J	V _R =4.0V, f=1MHz	240	-	pF	

Note:

1. Mounted on copper pad area of 30 x 30mm to each terminal.

Ratings and Characteristics Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

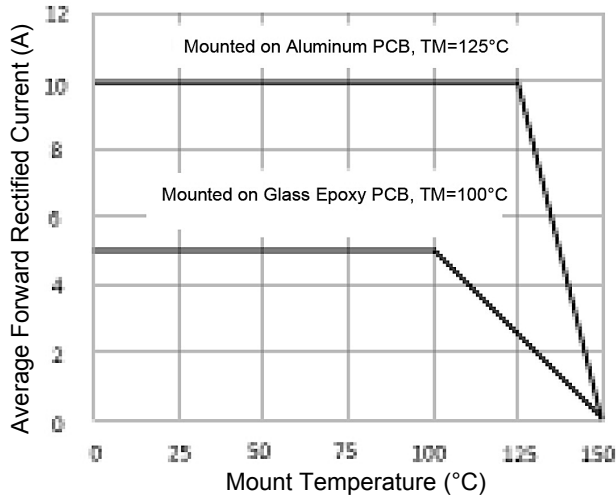


Figure 1. Forward Current Derating Curve

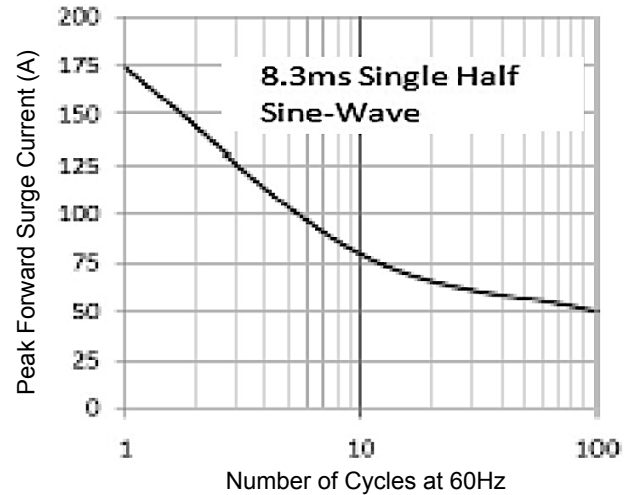


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

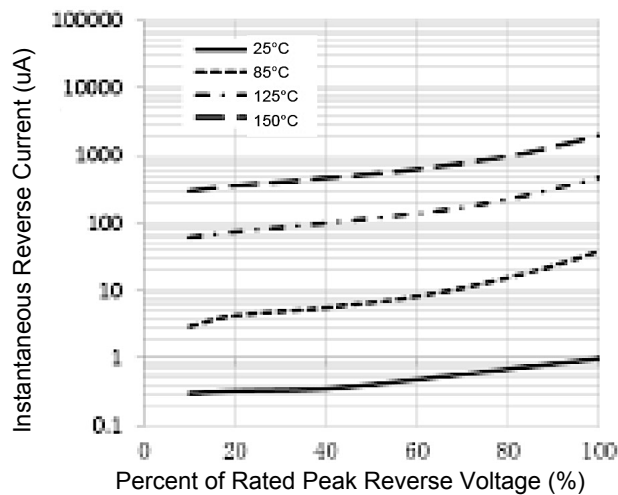


Figure 3. Typical Reverse Characteristics

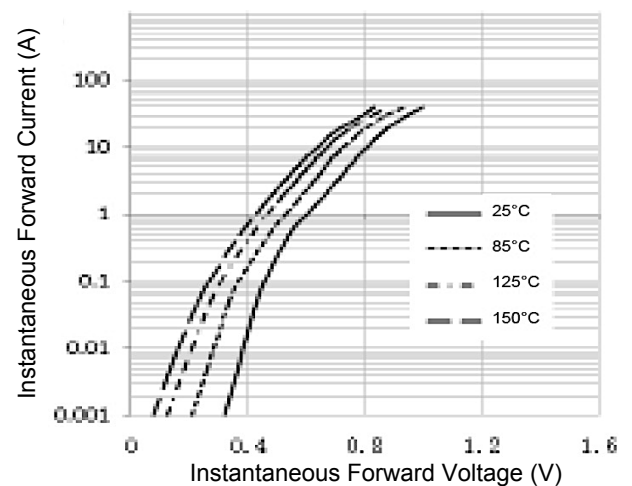


Figure 4. Typical Instantaneous Forward Characteristics


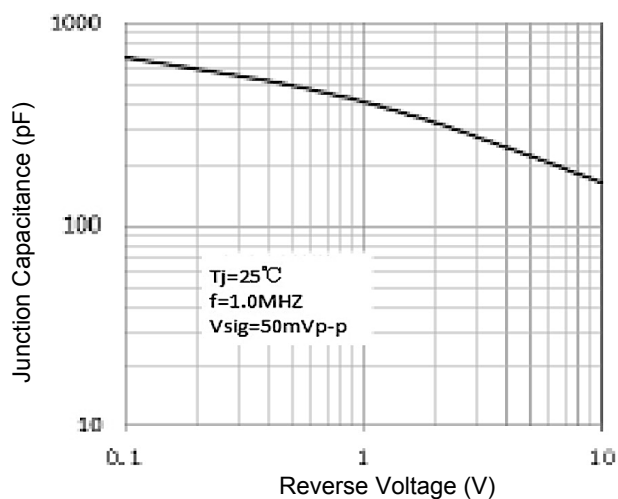



Figure 5. Typical Junction Capacitance

Package Outline Dimensions (TO-277)

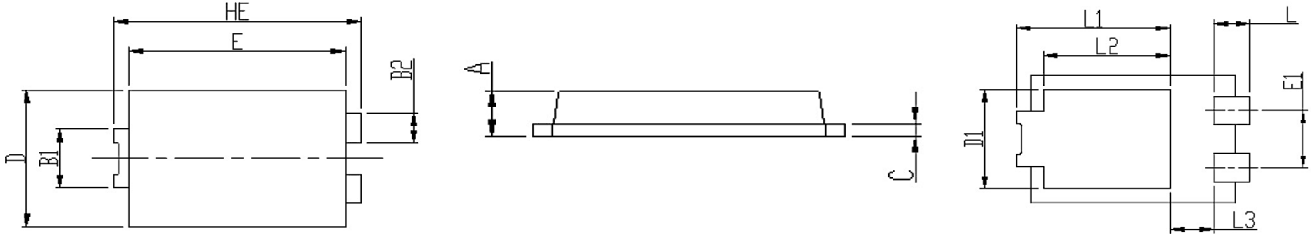

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
HE	6.40	6.60	0.252	0.260
E	5.60	5.80	0.220	0.228
D	4.10	4.30	0.161	0.169
B1	1.70	1.90	0.067	0.075
B2	0.80	1.00	0.031	0.039
A	1.05	1.20	0.041	0.047
C	0.30	0.40	0.012	0.016
L	0.85	1.10	0.033	0.043
L1	4.20	4.40	0.165	0.173
L2	3.52 Typ		0.139 Typ	
L3	1.10	1.40	0.043	0.055
D1	3.00	3.30	0.118	0.130
E1	1.86 Typ		0.073 Typ	

Recommended Pad Layout

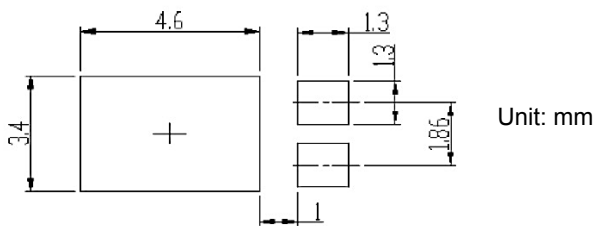

Order Information

Device	Package	Marking	Carrier	Quantity
GSGC101B5S	TO-277	C101B5S	Tape & Reel	5,000 Pcs / Reel