



Features

- High voltage
- High voltage amplifier application



SOT-223



Schematic Diagram

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	180	V
Collector-Emitter Voltage	V_{CEO}	160	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	I_C	600	mA
Collector Power Dissipation	P_C	1	W
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	125	$^\circ\text{C}/\text{W}$
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=0.1\text{mA}, I_E=0$	180	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1\text{mA}, I_B=0$	160	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=0.01\text{mA}, I_C=0$	6	-	-	V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=120\text{V}, I_E=0$	-	-	50	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=4\text{V}, I_C=0$	-	-	50	nA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=5\text{V}, I_C=1\text{mA}$	80	-	-	-
	$h_{FE(2)}$	$V_{CE}=5\text{V}, I_C=10\text{mA}$	100	-	300	-
	$h_{FE(3)}$	$V_{CE}=5\text{V}, I_C=50\text{mA}$	30	-	-	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10\text{mA}, I_B=1\text{mA}$	-	-	0.15	V
		$I_C=50\text{mA}, I_B=5\text{mA}$	-	-	0.2	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=10\text{mA}, I_B=1\text{mA}$	-	-	1	V
		$I_C=50\text{mA}, I_B=5\text{mA}$	-	-	1	V
Transition Frequency	f_T	$V_{CE}=10\text{V}, I_C=10\text{mA}, F=100\text{MHz}$	100	-	300	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0, F=1\text{MHz}$	-	-	6	pF
Emitter Input Capacitance	C_{ib}	$V_{BE}=0.5\text{V}, I_C=0, F=1\text{MHz}$	-	-	20	pF

Typical Electrical Characteristic Curves

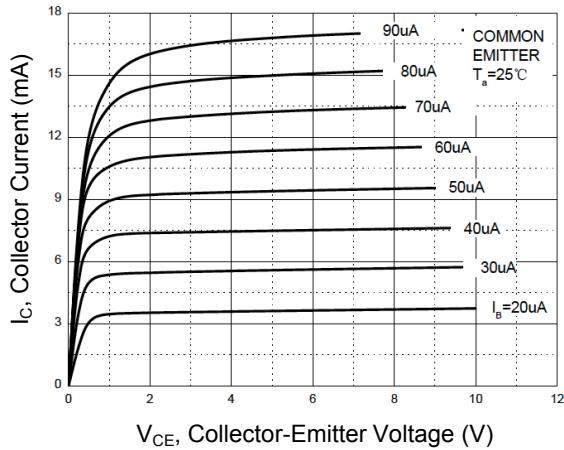


Figure 1. Static Characteristic

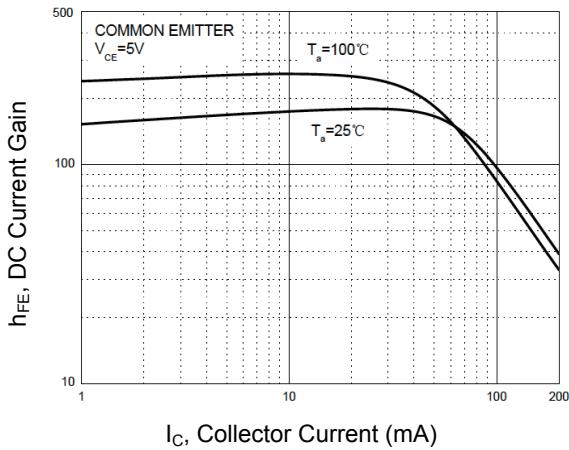


Figure 2. h_{FE} — I_C

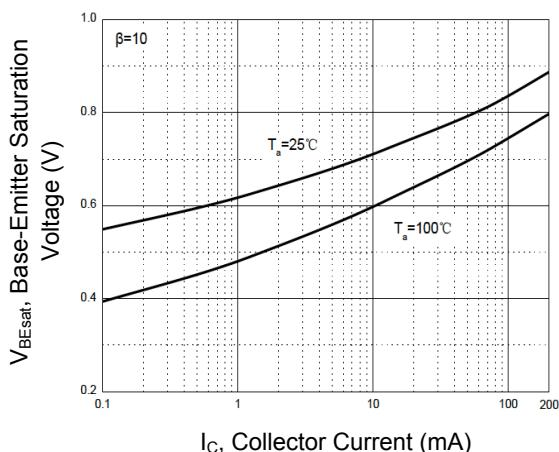


Figure 3. V_{BEsat} — I_C

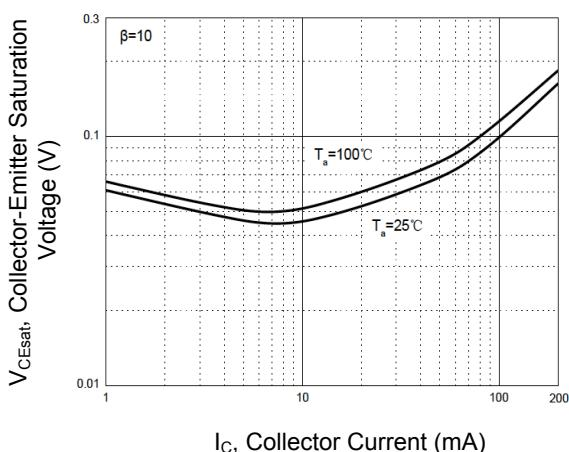


Figure 4. V_{CESat} — I_C

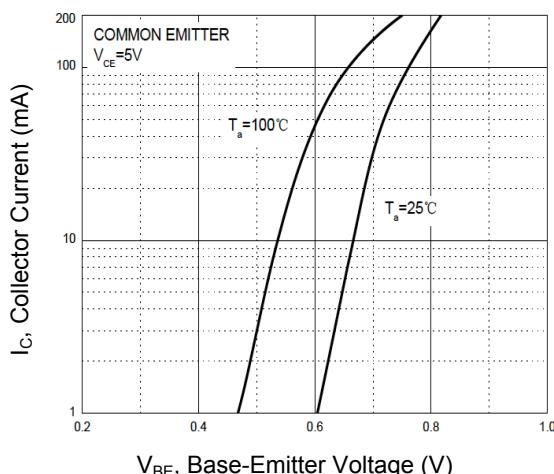


Figure 5. I_C — V_{BE}

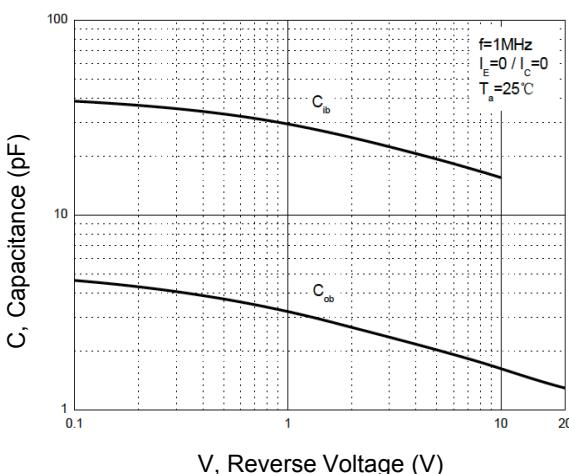


Figure 6. C_{oe}/C_{ib} — V_{CB}/V_{EB}

Typical Electrical Characteristic Curves

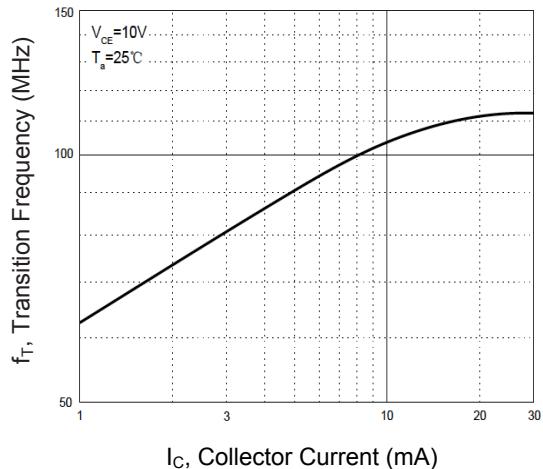


Figure 6. f_T — I_C


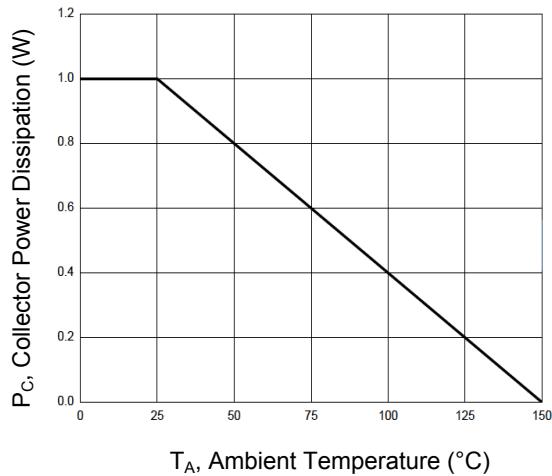



Figure 8. P_c — T_a

Package Outline Dimensions (SOT-223)

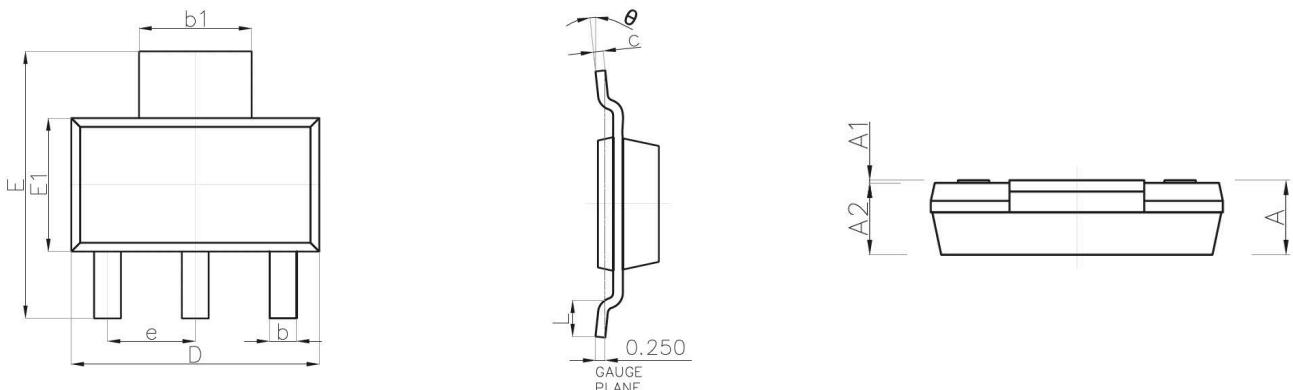

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	-	1.800	-	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	6.700	7.300	0.264	0.287
E1	3.300	3.700	0.130	0.146
e	2.300 (BSC)		0.091 (BSC)	
L	0.750	-	0.030	-
θ	0°	10°	0°	10°

Recommended Pad Layout



Note:

1. Controlling dimension: in millimeters.
 2. General tolerance: $\pm 0.05\text{mm}$.
 3. The pad layout is for reference purposes only.

Order Information

Device	Package	Marking	Quantity	HSF Status
PZT5551	SOT-223	ZT5551	2,500pcs / Reel	RoHS Compliant