



# HER101G thru HER108G

Glass Passivated High Efficient Rectifiers  
Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere

## Features

- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High reliability
- ◆ High surge current capability




DO-204AL (DO-41)

A-405

## Mechanical Data

- ◆ Case: Molded plastic DO-204AL(DO-41)/A-405
- ◆ Epoxy: UL 94V-O rate flame retardant
- ◆ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ◆ Polarity: Color band denotes cathode end
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds .375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ◆ Weight: DO-41 - 0.012 ounce, 0.335 gram  
A-405 - 0.008 ounce, 0.22 gram

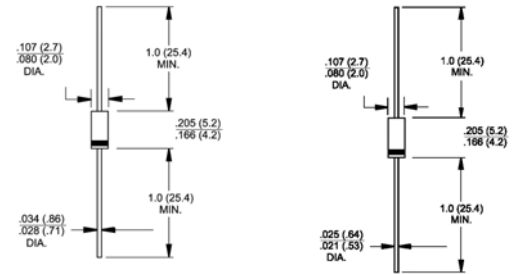

Dimensions in inches and (millimeters)      Dimensions in inches and (millimeters)

**Note:** Lead diameter is 0.025(0.64)/0.021(0.53) for part numbers from HER101SG thru HER108SG

## Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Parameter	Symbols	HER 101G	HER 102G	HER 103G	HER 104G	HER 105G	HER 106G	HER 107G	HER 108G	Units	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	Volts	
Maximum RMS voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	Volts	
Maximum DC blocking voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	Volts	
Maximum average forward rectified current .375" (9.5mm) lead length @ $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.0								Amp	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30.0								Amps	
Maximum instantaneous forward voltage @ 1.0A	$V_F$	1.0			1.3		1.7			Volts	
Maximum DC reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$	$I_R$	5.0				100					$\mu\text{A}$
Maximum reverse recovery time (Note 1)	$t_{rr}$	50			75						nS
Typical junction capacitance (Note 2)	$C_j$	20			15						pF
Typical thermal resistance	$R_{\theta JA}$ $R_{\theta JC}$	60				18					$^\circ\text{C/W}$
Operating temperature range	$T_J$	-55 to +150								$^\circ\text{C}$	
Storage temperature range	$T_{STG}$	-55 to +150								$^\circ\text{C}$	

**Notes:** 1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$   
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

# RATINGS AND CHARACTERISTIC CURVES

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

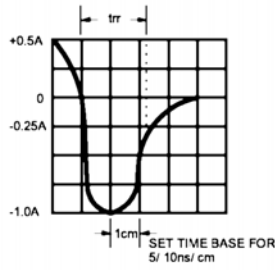
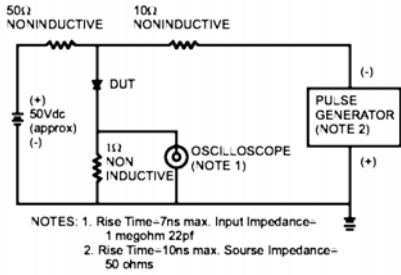


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

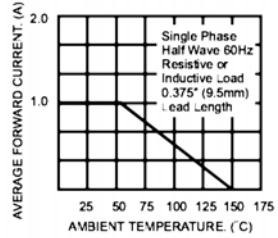


FIG.3- TYPICAL REVERSE CHARACTERISTICS

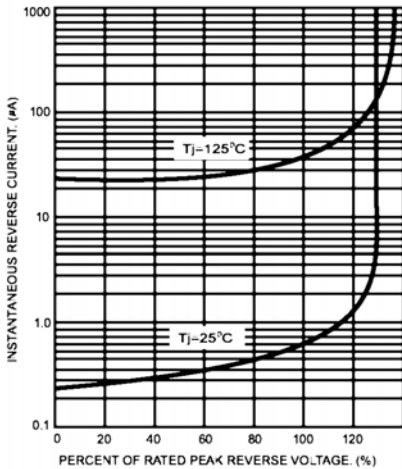


FIG.4- TYPICAL FORWARD CHARACTERISTICS

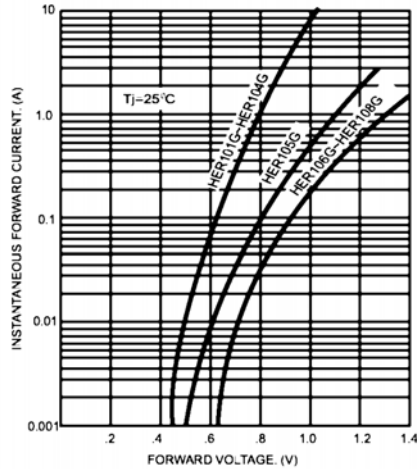


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

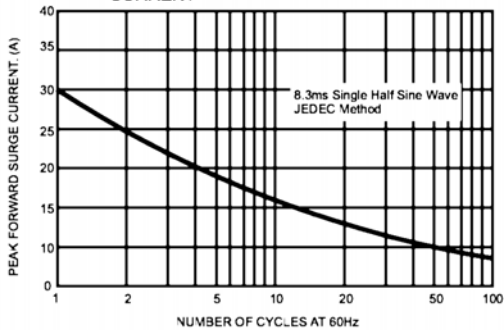


FIG.6- TYPICAL JUNCTION CAPACITANCE

